



# DIMMABLE ELECTRONIC 0-10V LED DRIVER



- Constant voltage output
- 120V/277V input voltage
- Temperature protection with auto reset after cooling
- Short circuit protection
- Overload protection with auto reset
- Optimal performance dims to 0%\*



## TECHNICAL INFORMATION

\*NOTES: For optimal performance recommended loading is 80%. Performance can be affected by driver loading and dimmer type. For dimmer compatibility information, see page 4.

	INPUT	OUTPUT	WATTAGE	OPERATING TEMP	WEIGHT	CLASS	RATING
LLI-PS-DE010-030W-24V-KO	120/277V	24V	30W	Do not exceed 140° F	2.1 LBS	Class 2	IP66 Wet Location
LLI-PS-DE010-060W-24V-KO	120/277V	24V	60W	Do not exceed 140° F	2.4 LBS	Class 2	IP66 Wet Location
LLI-PS-DE010-096W-24V-KO	120/277V	24V	96W	Do not exceed 140° F	2.9 LBS	Class 2	IP66 Wet Location
LLI-PS-DE010-200W-24V-KO	120/277V	24V	200W	Do not exceed 140° F	3.3 LBS	Class 1	IP66 Wet Location
LLI-PS-DE010-300W-24V-KO	120/277V	24V	300W	Do not exceed 140° F	4.0 LBS	Class 1	IP66 Wet Location

## PART NUMBER BUILDER / ORDERING GUIDE


Example part number: LLI-PS-DE010-200W-24V-KO

SERIES	WATTAGE	LENS	KNOCKOUT
LLI-PS-DE010		24V	KO
	030W		
	060W		
	096W		
	200W		
	300W		


# DIMMABLE ELECTRONIC 0-10V LED DRIVER

## DIMENSIONS


LLI-PS-DE010-030W

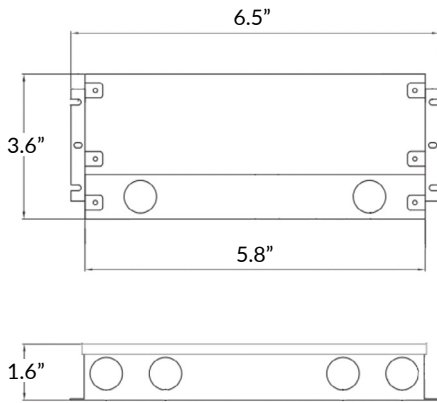


LLI-PS-DE010-060W

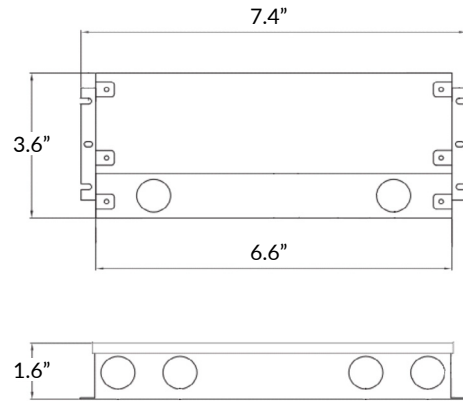


LLI-PS-DE010-096W

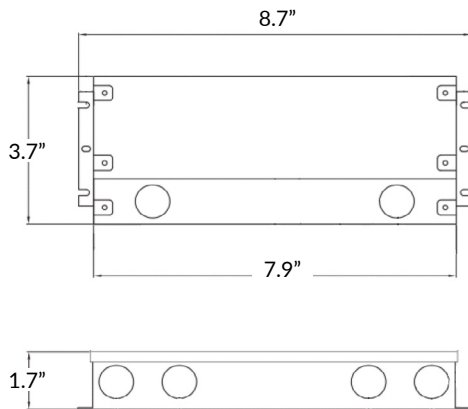

LLI-PS-DE010-200W

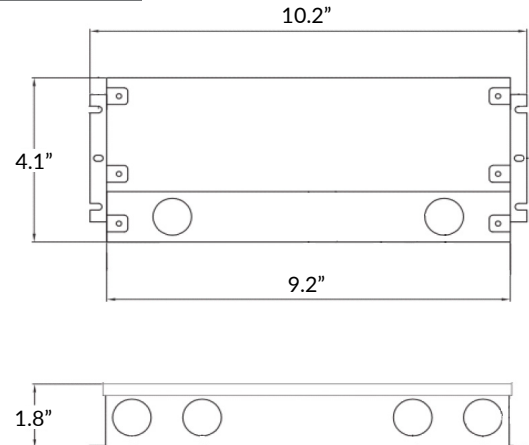


LLI-PS-DE010-300W

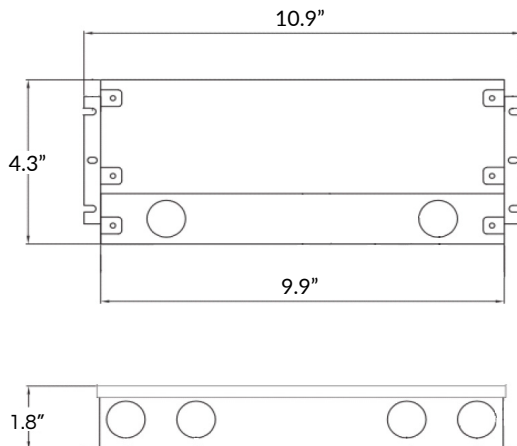

# DIMMABLE ELECTRONIC 0-10V LED DRIVER

## WIRING DIAGRAM

all models

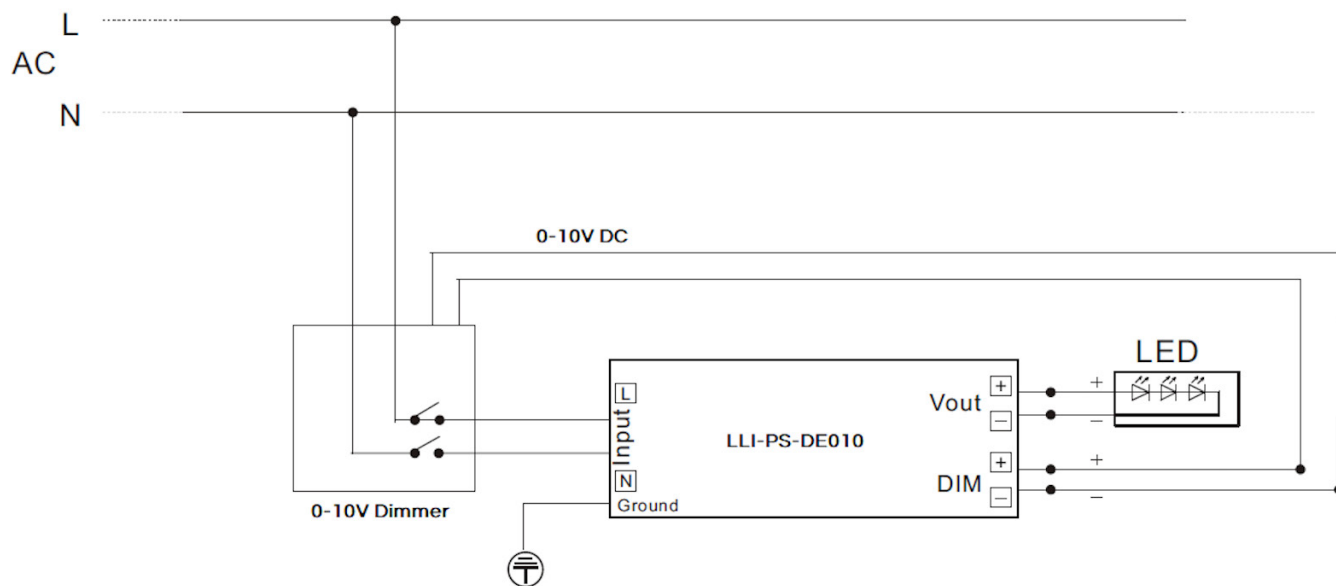

# DIMMABLE ELECTRONIC 0-10V LED DRIVER

## DIMMER COMPATIBILITY

---

BRAND	MODEL	INPUT VOLTAGE	RANGE
LUTRON	DVSTV-WH	120V	4.5 - 100%
	DVTV-WH	120V	8 - 100%