


COB Tapelight

5 YEAR
LIMITED
WARRANTY

c **UL** US
LISTED

IP20

RoHS
COMPLIANT

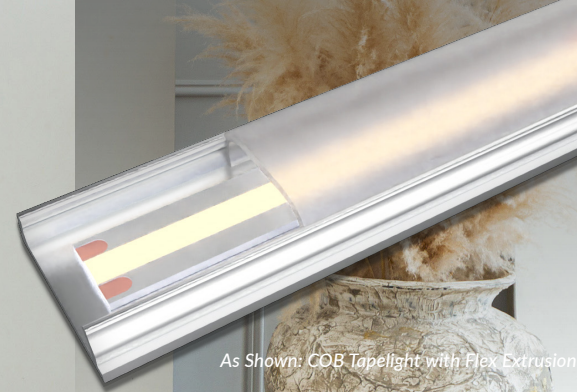


As Shown: COB Tapelight with Flex Extrusion

FEATURES

- Provides uniform illumination with no diode imaging in low profile extrusions.
- Dissipates heat faster & a longer life than a standard strip light.
- Great selection for use with a range of low profile extrusions (Thin, Flex, & Wide extrusion).
- Multiple solder-less connector options available.

Reference website for additional information

INSTALLATION

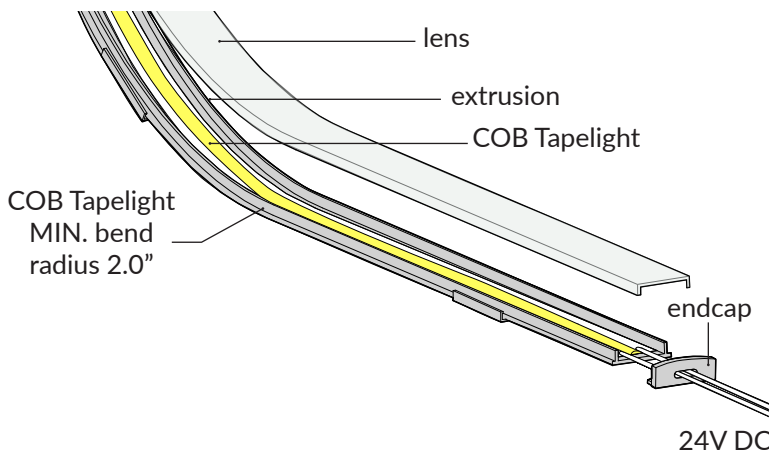

SPECIFICATIONS

PART NUMBER	LLI-LCOB4.6W-XX
WATTAGE	4.6W per foot
CCT	2700K, 3000K, 3500K, 4000K, 6500K
OUTPUT	380 lm/ft - 412 lm/ft (raw lumens)
MAXIMUM RUN	16 ft
IP RATING	IP20 - dry locations
INPUT VOLTAGE	24VDC, requires a remote 24V power supply
MOUNTING	Rigid extrusions, flexible extrusion, mounting clips
DIMMING	Forward Phase / Triac dimmers / 0 - 10V

CONNECTOR TYPES



TAPE-TO-TAPE: COB CONNECTOR



TAPE-TO-WIRE: 6IN WIRE COB CONNECTOR



TAPE-TO-TAPE: 6IN JUMPER COB CONNECTOR