

STAND ALONE DMX CONTROLLER, STICK-GU2



QUICK SPECIFICATIONS

INCLUDED IN PACKAGE	Controller, CD-ROM, USB cable, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher, USB 2.0 port
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (included)
CONNECTIONS	Power (2 pins), DMX (3 pins), Port (2 pins), Micro-USB Port
POWER SUPPLY	6VDC power supply (included)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only
WARRANTY	5 year limited



PART NUMBER


SERIES	PROTOCOL	TYPE
LLI-C-CTRL	- DMX	- STICK-GU2

FEATURES

- Compatible with any DMX LED driver
- Up to 24 dynamic or static scenes
- Wall mounted control panel with glass face, touch-sensitive buttons
- Programmable with included USB cable and software - no Ethernet or WiFi required

NOTE

DMX Certified Cable is required for use between Decoders/Receivers and Controllers. The cable must be rated for electronic transmission. Standard solid/stranded building wire (THHN & others) will not work to transmit the DMX signal.

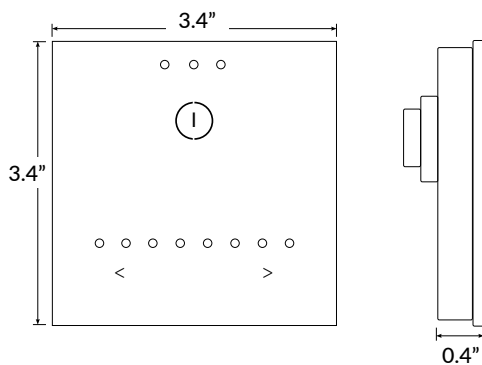

AVAILABLE MEMORY

CHANNELS	STEPS
8	1691
16	1011
32	557
48	383
64	291
80	233
96	195
112	166
128	145

STAND ALONE DMX CONTROLLER, STICK-GU2

EXAMPLE WIRING DIAGRAM LED POWER SUPPLY, DECODER, AND LED TAPE SOLD SEPARATELY

