

TOUCH PANEL WALL CONTROLLER

QUICK SPECIFICATIONS

LED TAPELIGHT COMPATIBILITY	Compatible with 12-24V DC LED tapelights
PROTOCOL	RF wireless or DMX hardware
ZONES	RGBW - 3 zones Tunable White - 4 zones, 2 scenes
INTERFACE	Glass touch control
WARRANTY	5 year limited



RGBW CONTROLLER



TUNABLE WHITE CONTROLLER

5 YEAR LIMITED WARRANTY


POWER

Power supply for controller not included.
12-24V DC power supply required for controller.


For DMX protocol, DMX Certified Cable is required for use between Decoders/Receivers and Controllers. The cable must be rated for electronic transmission. Standard solid/stranded building wire (THHN & others) will not work to transmit the DMX signal.

PART NUMBER

SERIES	PROTOCOL	FUNCTION	STYLE
LLI-C-CTRL	[blank] RF DMX DMX	RGBW RGB(W) TW Tunable White	TP Touch Panel

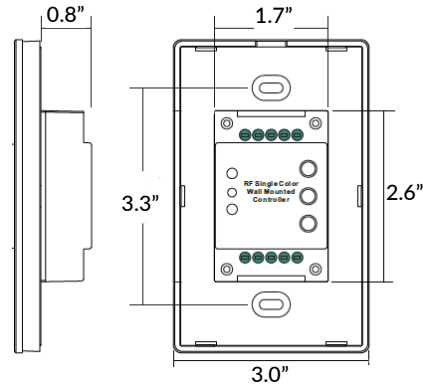


EXAMPLE RGB(W) RF WIRING DIAGRAM POWER SUPPLY, RECEIVER, AND LED TAPELIGHT SOLD SEPARATELY

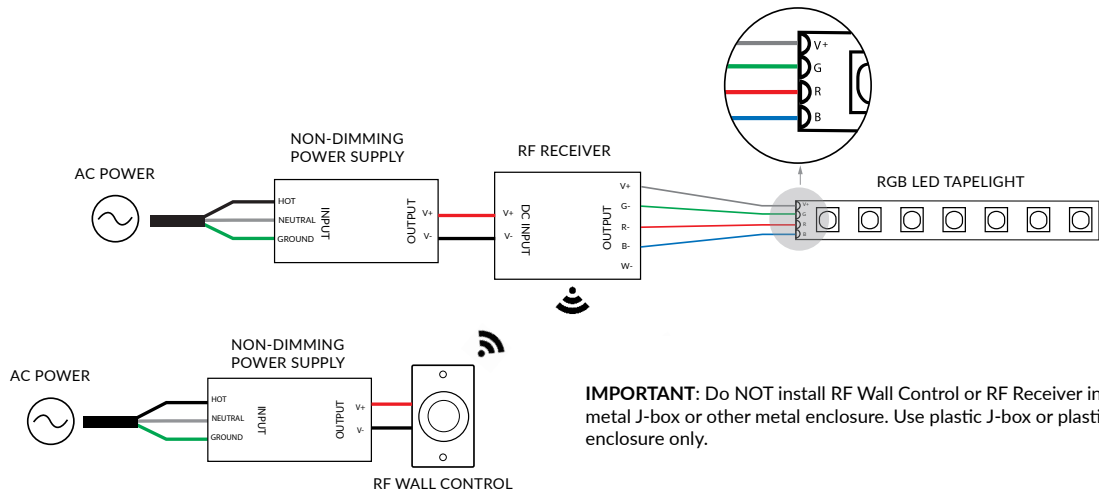


IMPORTANT: Do NOT install RF Wall Control or RF Receiver inside metal J-box or other metal enclosure. Use plastic J-box or plastic enclosure only.

TOUCH PANEL WALL CONTROLLER

EXAMPLE RGB(W) DMX WIRING DIAGRAM POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

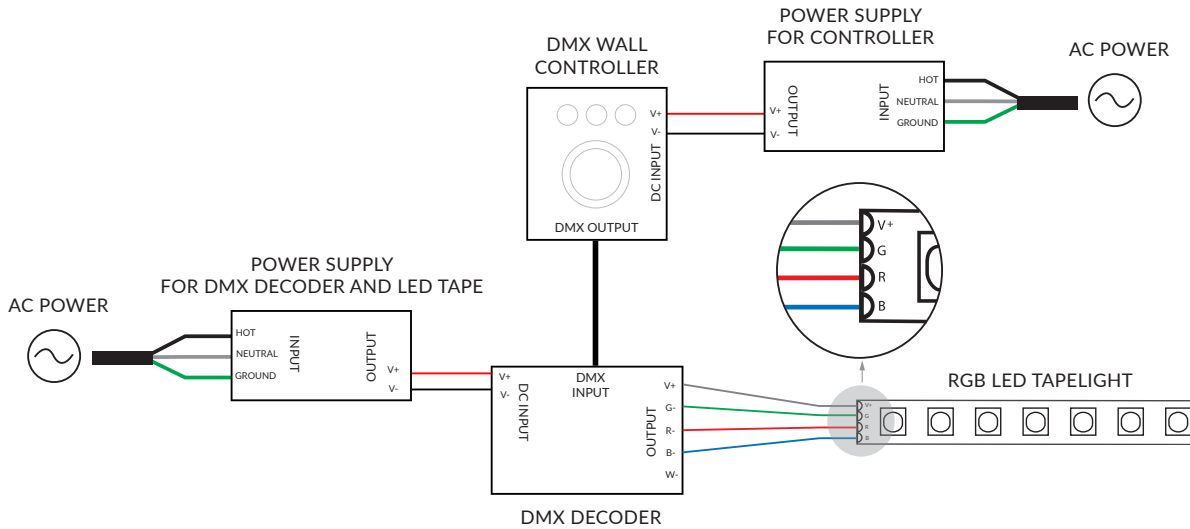

EXAMPLE TUNABLE WHITE RF WIRING DIAGRAM POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

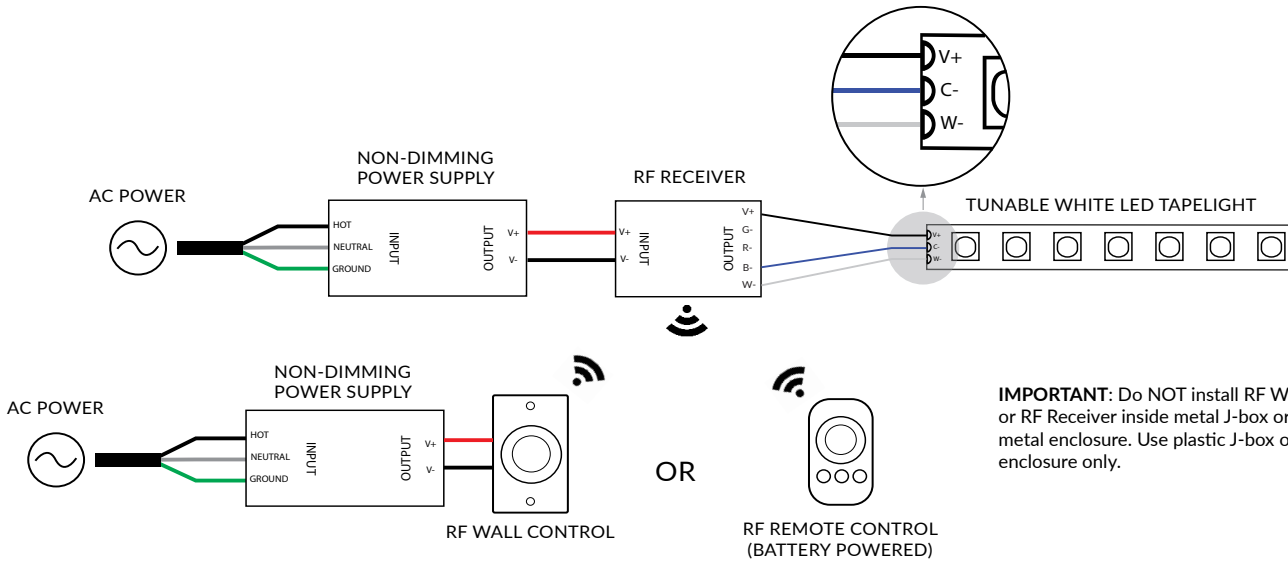

IMPORTANT: Do NOT install RF Wall Control or RF Receiver inside metal J-box or other metal enclosure. Use plastic J-box or plastic enclosure only.

EXAMPLE TUNABLE DMX WIRING DIAGRAM

POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

