

# TOUCH PANEL WALL CONTROLLER

## QUICK SPECIFICATIONS

LED TAPELIGHT COMPATIBILITY	Compatible with 12-24V DC LED tapelights
PROTOCOL	RF wireless or DMX hardware
ZONES	RGBW - 3 zones Tunable White - 4 zones, 2 scenes
INTERFACE	Glass touch control
WARRANTY	5 year limited

### POWER

Power supply for controller not included.  
12-24V DC power supply required for controller.

For DMX protocol, DMX Certified Cable is required for use between Decoders/Receivers and Controllers. The cable must be rated for electronic transmission. Standard solid/stranded building wire (THHN & others) will not work to transmit the DMX signal.



RGBW CONTROLLER




TUNABLE WHITE CONTROLLER


5 YEAR LIMITED WARRANTY

## PART NUMBER

SERIES	PROTOCOL	FUNCTION	STYLE
LLI-C-CTRL	[blank] RF	RGBW RGB(W)	TP Touch Panel
	DMX DMX	TW Tunable White	

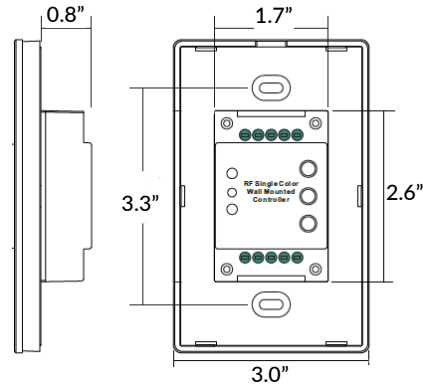


## EXAMPLE RGB(W) RF WIRING DIAGRAM POWER SUPPLY, RECEIVER, AND LED TAPELIGHT SOLD SEPARATELY

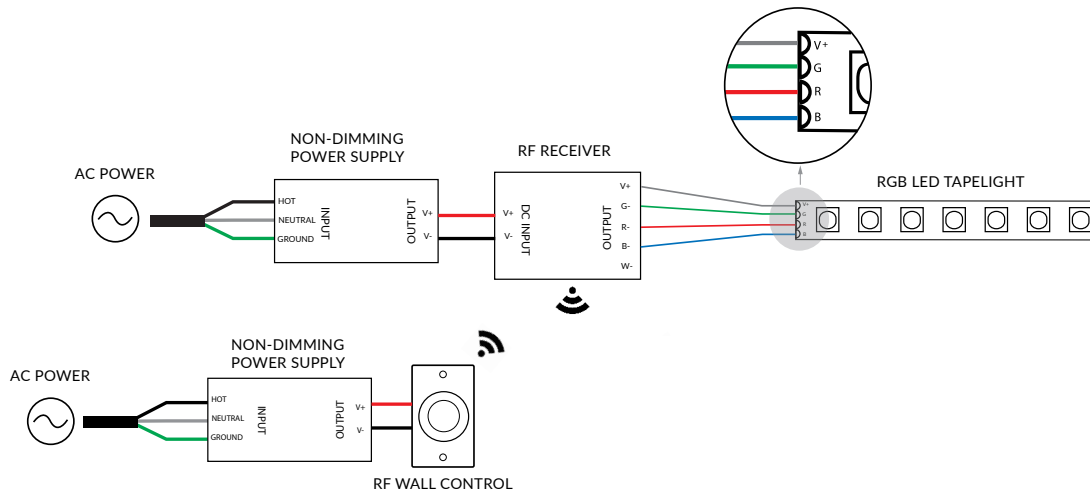


# TOUCH PANEL WALL CONTROLLER

EXAMPLE RGB(W) DMX WIRING DIAGRAM POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

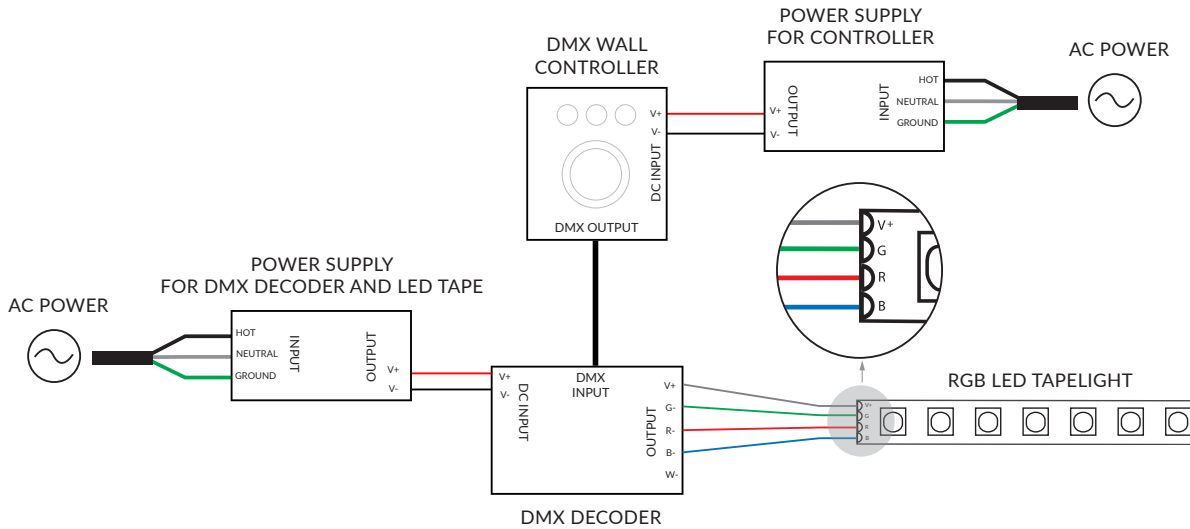

EXAMPLE TUNABLE WHITE RF WIRING DIAGRAM POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

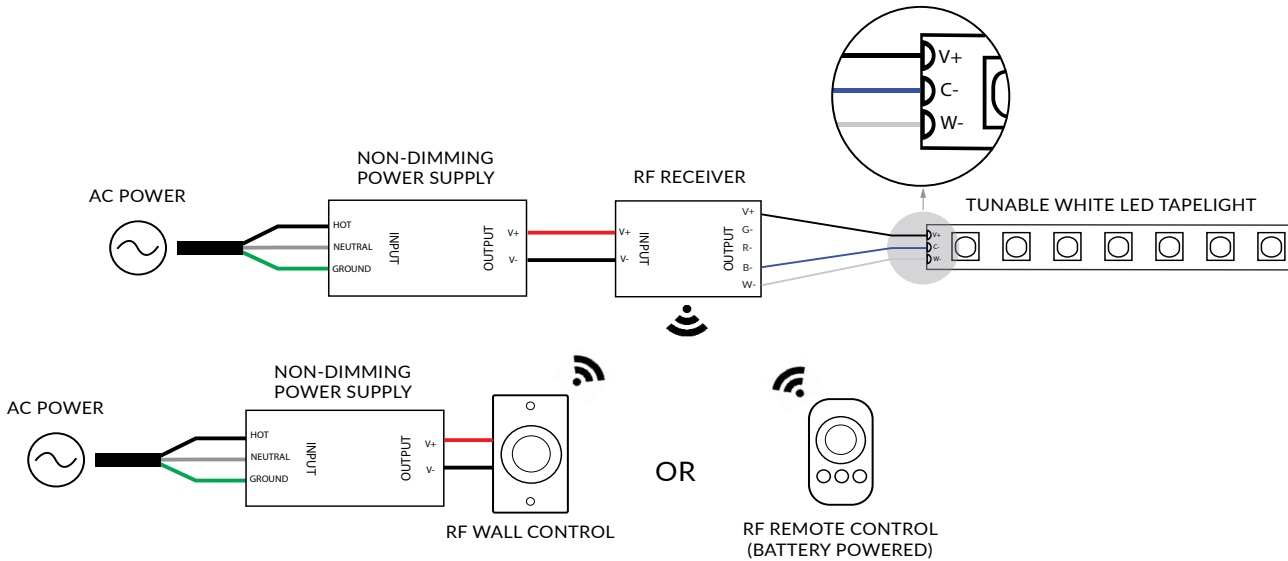

# EXAMPLE TUNABLE DMX WIRING DIAGRAM

POWER SUPPLY, DECODER, AND LED TAPELIGHT SOLD SEPARATELY

