


DMX DECODER, IP67 WET RATED

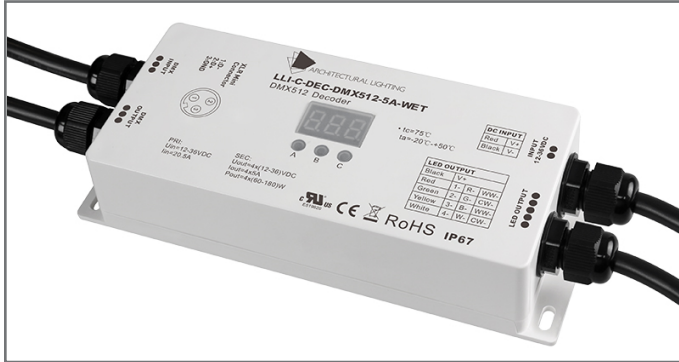

QUICK SPECIFICATIONS

LOCATION RATING	IP67 - wet locations. Do not submerge. Limited protection against harsh environments.
FUNCTION	Static color, tunable white, RGB(W) LEDs
CHANNELS	4 Channels, 5 Amp
OPERATING TEMP.	-4°F to 122°F
CAPACITY	12V - 60W maximum
	24V - 120W maximum

DMX ADDRESSABILITY

512 addressable DMX channels with digital display.


DMX Certified Cable is required for use between Decoders/ Receivers and Controllers. The cable must be rated for electronic transmission. Standard solid/stranded building wire (THHN & others) will not work to transmit the DMX signal.

POWER

Power supply not included. 12V or 24V power supply required.

PART NUMBER

SERIES	TYPE	CAPACITY	LOCATION
LLI-C-DEC	- DMX512	- 5A	- WET

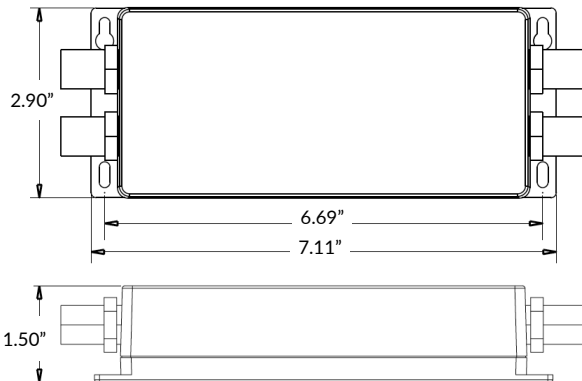

DMX DECODER, IP67 WET RATED

WIRING DIAGRAM

