

RDM DMX DECODER

QUICK SPECIFICATIONS



OUTPUT	8A maximum, 5 channels
IP RATING	IP20 - dry locations
FUNCTION	RDM communication and PWM dimming for static white, single color, tunable white, RGB(W), and tunable white RGBW LEDs
CAPACITY	12V - 96W maximum 24V - 192W maximum
COMPATIBILITY	Compatible with LLI-C-CTRL-DMX controllers
WARRANTY	5 year limited


PART NUMBER

SERIES	PROTOCOL	CAPACITY	COMM.
LLI-C-DEC	DMX512	8A	RDM

FEATURES

Can be controlled by up to eight (8) controllers.
Can be synchronized with twenty (20) decoders.

DMX Certified Cable is required for use between Decoders/Receivers and Controllers. The cable must be rated for electronic transmission. Standard solid/stranded building wire (THHN & others) will not work to transmit the DMX signal.

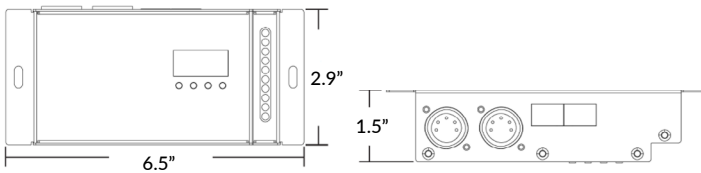

POWER

Power supply not included. 12V/24V non-dimming power supply required.

WIRING DIAGRAM

