


ICON FLANGED EXTRUSION + LED TAPELIGHT



5 YEAR
LIMITED
WARRANTY

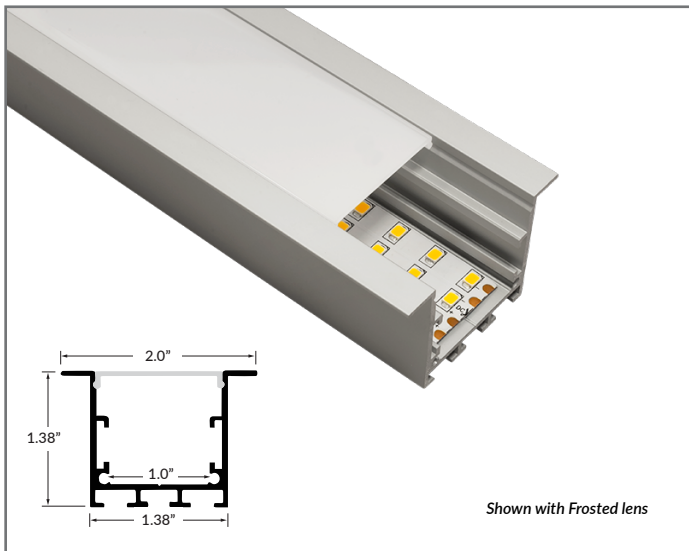

SPECIFICATIONS

FINISH	Silver Anodized
LENS	Frosted, Clear
WATTAGE	0.75W/ft to 8.8W/ft
IP RATING	IP20, IP65, IP68 - rating applies to tapelight, see page 2 for details
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM SPREAD	104° typical with Frosted lens
INPUT VOLTAGE	24VDC
LENGTH	Made to order. Actual lengths vary by LED tapelight cut points. Maximum assembled length is 94in. Lengths over 94in are made with multiple sections, shipped unassembled.
OUTPUT	40 to 412 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting clips recommended - see below
POWER SUPPLY	Requires a 24V power supply - see below
WARRANTY	IP20 - 5 year limited, IP65/67/68 - 3 year limited

FEATURES & RECOMMENDED APPLICATIONS

Modular extrusion with a frosted lens that provides a dot-free line of light. 90° corners available for making turns in a variety of applications, such as general lighting, accents, displays, shelving, and signage.



PRODUCT: LLI-ICF-SF-H6.6W-30K-24V-72IN

ICON FLANGED EXTRUSION + LED TAPELIGHT

ORDERING GUIDE

← PRODUCT CODE

1a. FINISH

1b. LENS

2. LED

3. IP RATING*

4. CCT / COLOR

5. LENGTH

OPTIONAL →

6. MOUNTING

7. LEAD TYPE

8. LEAD LENGTH

9. FEED TYPE

PROFILE

LLI-ICF

1a. FINISH

S

Silver

1b. LENS

F

Frosted Clear

2. LED

H6.6W

WATTS/FT

0.75-8.8 W/ft

3. IP RATING*

[blank]

IP20

65 - IP65

68 - IP68

4. CCT / COLOR

30K

22K-52K

Warm Fade

Tunable White

Static Color

RGB

RGBW

5. LENGTH

48IN

Enter overall length in inches. Length can be a complete section (if under max run) or separated into smaller sections. Nominal length only. Actual lengths vary by LED cut point.

6. MOUNTING

[blank]

Default [blank] - Ships standard with spring clips.

Refer to section 6 on the next page if you require alternate mounting.

7. LEAD TYPE

[blank]

Default [blank] - 48" hard wire rear feed (PWR48RF)

Refer to section 7 on the next page for an alternate power feed configuration.

Example part number: LLI-ICF-SF-H6.6W-65-35K-24V-48IN

More LED tapelight and color options available upon request. Visit www.llilighting.com or contact us for details.

1. FINISH & LENS

1a. FINISH	1b. LENS
S	F
S Silver Anodized finish	F Frosted lens
	C Clear lens

2-4. LED TAPELIGHT OPTIONS

2. LED CODE			3. IP RATING*		4. CCT / COLOR		TECHNICAL DATA						
H6.6W			[blank]		30K		WATTAGE	DELIVERED LM/FT @ 30K^	FROSTED LENS APPEARANCE**	CRI	MAX. RUN	CUT POINTS*	
			For IP20, leave [blank].										
T0.75W (White)			20 / 65		22K / 27K / 30K / 35K / 42K / 52K		0.75 W/ft	40 lm/ft	UNIFORM	90+	26 ft	1"	
1.5W (White)			20 / 65* / 68*		22K / 27K / 30K / 35K / 42K / 52K		1.5 W/ft	74 lm/ft	UNIFORM	90+	60 ft	3.9"	
T1.5W (White)			20 / 65		22K / 27K / 30K / 35K / 42K / 52K		1.5 W/ft	80 lm/ft	UNIFORM	90+	26 ft	1"	
2.2W (White)			20 / 65* / 68*		22K / 27K / 30K / 35K / 42K / 52K		2.2 W/ft	98 lm/ft	UNIFORM	90+	60 ft	3.9"	
2.5W (White)			20 / 65 / 68		22K / 24K / 27K / 30K / 35K / 42K / 52K		2.5 W/ft	98 lm/ft	UNIFORM	90+	32 ft	2"	
T2.5W (White)			20 / 65		22K / 27K / 30K / 35K / 42K / 52K		2.5 W/ft	105 lm/ft	UNIFORM	90+	20 ft	1"	
3.5W (White)			20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		3.5 W/ft	124 lm/ft	UNIFORM	90+	40 ft	2.5"	
◆	WF3.5W (Warm Fade)		🔵🟡	20 / 65 / 68		27D (18-27K) / 30D (18-30K)		3.5 W/ft	140 lm/ft	UNIFORM	90+	16 ft	2.5"
TW2.7W (Tunable White)			🟡🟢🔵	20 / 65 / 68		1835 (18-35K) / 2235 (22-35K) / 2752 (27-52K)		2.7 W/ft	144 lm/ft	UNIFORM	90+	26 ft	3.3"
4.4W (White)			20 / 65 / 68		22K / 24K / 27K / 30K / 35K / 42K / 52K		4.4 W/ft	151 lm/ft	UNIFORM	90+	32 ft	2"	
H3.5W (White)			20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		3.5 W/ft	188 lm/ft	UNIFORM	90+	26 ft	2.5"	
T5.0W (White)			20 / 65		22K / 27K / 30K / 35K / 42K / 52K		5.0 W/ft	203 lm/ft	UNIFORM	90+	13 ft	1"	
H4.0W (White)			20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		4.0 W/ft	209 lm/ft	UNIFORM	90+	40 ft	1.3"	
R5.4W (White, High R9)			20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		5.4 W/ft	242 lm/ft	UNIFORM	95+	16 ft	1"	
H4.4W (White)			20 / 65 / 68		22K / 24K / 27K / 30K / 35K / 42K / 52K		4.4 W/ft	242 lm/ft	UNIFORM	90+	32 ft	2"	
TW5.3W (Tunable White)			🟡🟢🔵	20 / 65 / 68		1835 (18-35K) / 2235 (22-35K) / 2752 (27-52K)		5.3 W/ft	253 lm/ft	UNIFORM	90+	16 ft	3.3"
★	8.8W (White)		20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		8.8 W/ft	265 lm/ft	UNIFORM	90+	32 ft	1"	
★	H6.6W (White)		20 / 65 / 68		22K / 27K / 30K / 35K / 42K / 52K		6.6 W/ft	341 lm/ft	UNIFORM	90+	16 ft	1.3"	
H5.3W (White)			20 / 68		27K / 30K / 35K / 42K / 52K		5.3 W/ft	352 lm/ft	UNIFORM	90+	16 ft	2"	
H7.9W (White)			20 / 65		27K / 30K / 35K / 42K / 52K		7.9 W/ft	393 lm/ft	UNIFORM	90+	32 ft	3.4"	
★	HO5.9W (White)		20 / 68		27K / 30K / 35K / 42K / 52K		5.9 W/ft	412 lm/ft	UNIFORM	90+	16 ft	2"	
C2.2W (Static Color)			20 / 65 / 68		RED / AMB / GRN / BLU		2.2 W/ft	N/A	UNIFORM	—	60 ft	3.9"	
C4.4W (Static Color)			20 / 65 / 68		RED / AMB / GRN / BLU		4.4 W/ft	N/A	UNIFORM	—	32 ft	2"	
CC4.4W (RGB)			🟢🔵🟡	20 / 65 / 68		RGB		4.4 W/ft	55 lm/ft	UNIFORM	—	32 ft	3.9"
TC4.4W (RGB)			🟢🔵🟡	20 / 65		RGB		4.4 W/ft	80 lm/ft	UNIFORM	—	32 ft	2"
★	CC5.9W (RGB)		🟢🔵🟡	20 / 65		RGB		5.9 W/ft	147 lm/ft	UNIFORM	—	32 ft	2.8"
CW5.8W (RGBW)			🟢🔵🟡🟢	20 / 65 / 68		R30 (RGB + 30K) / R60		5.8 W/ft	133 lm/ft	UNIFORM	80+	32 ft	3.9"
CW7.0W (RGBW)			🟢🔵🟡🟢	20		R30 (RGB + 30K) / R60		7.0 W/ft	154 lm/ft	UNIFORM	90+	28 ft	2.5"
★	CW7.6W (RGBW)		🟢🔵🟡🟢	20 / 65 / 68		R22 (RGB + 22K) / R27 / R30 / R35 / R42 / R52		7.6 W/ft	162 lm/ft	UNIFORM	90+	16 ft	2.5"
★	CW8.8W (RGBW)		🟢🔵🟡🟢	20 / 65		R27 (RGB + 27K) / R30 / R35 / R42 / R52		8.8 W/ft	276 lm/ft	UNIFORM	90+	22 ft	3.9"

* 1.5W and 2.2W IP65/IP68 tapelight maximum run is reduced to 50 ft, only IP20 may reach maximum run of 60 ft.

♦ Warm Fade tapelight requires UDEFF or 0-10V dimmable power supply.

★ Recommended options.

** Diode visibility data tested at 100% output. Diodes may become more visible as tapelight dims.

^ Lumen data based on frosted lens, IP20 tapelight, 30K white output, or combined output for tunable white, warm fade, RGB, and RGB(W) tapelights.

* Protection varies according to IP Rating. See below or refer to llilighting.com/resources for more information.

 IP20, uncoated - Dry Location

 IP65, silicone covered - Wet Location - Limited protection from water ingress. Not suitable for applications that may see pooling or standing water conditions. Not suitable for submersion.

 IP68, solid silicone - Wet Location - Full protection against water ingress for most applications. Limited protection from water ingress in submerged applications.

 SEMI-UNIFORM
(for reference)
 UNIFORM

ICON FLANGED EXTRUSION + LED TAPELIGHT

ORDERING GUIDE (CONTINUED)

5. LENGTH

5.
LENGTH

48IN

Enter overall extrusion length in inches. Maximum assembled length is 94in. Lengths over 94in are made with multiple sections, shipped unassembled. Overall Extrusion+LED tapelight length will be rounded down based on nearest LED tapelight cut point.

6. MOUNTING (OPTIONAL)


6.

MOUNTING

[blank]

Default [blank] - Spring Clip

SPRING MOUNTING CLIP INCLUDED
UNLESS OTHERWISE SPECIFIED



1.0"L x 1.2" W x 1.7" H

7-9. POWER FEED (OPTIONAL)

7.

LEAD TYPE

[blank]

Default [blank] - 48" hard wire rear feed (PWR48RF)

8.

LEAD LENGTH

[blank]


Enter desired wire length in inches.

9.


FEED TYPE

[blank]

PWR Hard wire
MBC* Male barrel
FBC* Female barrel



Hard wire, no connector - default (PWR)



Male barrel connector (MBC)*




Female barrel connector (FBC)*


*Barrel connectors not compatible with RGB, RGB(W), or Tunable White tapelights.

EF End Feed
SL Left Side Feed
SR Right Side Feed
RF Rear Feed


STANDARD 48" HARD WIRE REAR FEED INCLUDED
UNLESS OTHERWISE SPECIFIED




End Feed (EF)



Right Side Feed (SR)




Left Side Feed (SL)




Rear Feed (RF) - default

FACTORY ASSEMBLED CORNERS (NO MITER CUTS REQUIRED. SCREWS AND JOINER BARS INCLUDED.)




T CORNER

LLI-XR-ICF-SF-TEE-12IN




X CORNER

LLI-XR-ICF-SF-CROSS-12IN




90° INSIDE CORNER

LLI-XR-ICF-SF-90D-INS-6IN



90° OUTSIDE CORNER


LLI-XR-ICF-SF-90D-OUT-6IN




90° FLAT CORNER

LLI-XR-ICF-SF-90D-FLT-6IN


WHAT'S INCLUDED




EXTRUSION WITH LENS




LED TAPELIGHT WITH
POWER FEED



ENDCAPS



MOUNTING CLIP



JOINER BARS
(Included if required for layout. Screws and hex wrench included)

ICON FLANGED EXTRUSION + LED TAPELIGHT

LUMEN OUTPUT MULTIPLIERS (FOR ESTIMATING DELIVERED LUMENS, FROSTED LENS ONLY)

COLOR TEMPERATURE	LUMEN MULTIPLIER
2200K	0.8
2700K	0.9
3000K	1
3500K	1.1
4200K	1.2
5200K	1.25




IP RATING	LUMEN MULTIPLIER
IP20	1
IP65	0.9
IP68	0.9

EXAMPLE: Extrusion with 8.8W, IP65, 5200K

(Output @ 30K) x (Color temperature lumen multiplier) x (IP rating lumen multiplier) = Estimated delivered lm/ft

265 lm/ft	x	1.25	x	0.9	=	298 lm/ft
-----------	---	------	---	-----	---	-----------

PHOTOMETRY

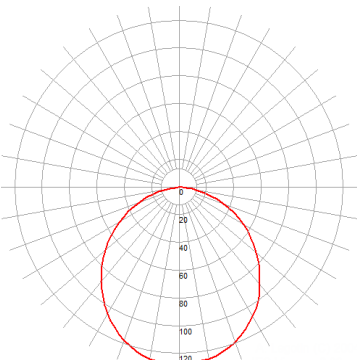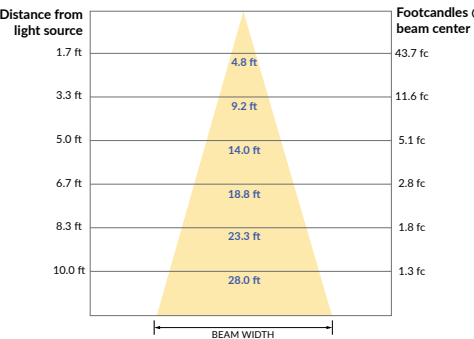LLI-ICF-SF-H6.6W-30K-24V*		BEAM SPREAD	POLAR CHART	CONICAL CHART
POWER (W/ft)	6.6W	104° 		ILLUMINANCE AT A DISTANCE 
OUTPUT (lm/ft)	341 lm/ft			
COLOR TEMPERATURE	3000K			
BEAM SPREAD	104°			
EFFICACY (lm/W)	51 lm/W			

*Information for other options available upon request. IES files for extrusion+tapelight available upon request.



POWER SUPPLIES SOLD SEPARATELY

DIMMABLE ELECTRONIC 0-10V

Optimal performance dims to 0%.*





PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

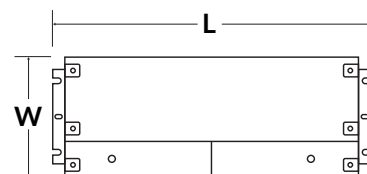

NON-DIMMABLE ELECTRONIC



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"


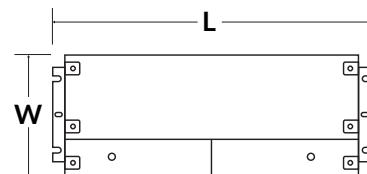


DIMMABLE ELECTRONIC FLICKER-FREE

Optimal performance dims to 2-5%.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"


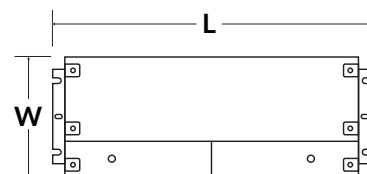


DIMMABLE MAGNETIC

Optimal performance dims to 5-10%.*



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DM-020W-24V-KO	20W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-040W-24V-KO	40W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-100W-24V-KO	100W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-150W-24V-KO	150W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-CL2-KO	6 x 50W	120V or 277V	24V	CLASS 2	NEMA 3R WET	10.29"	5.69"	3.43"
LLI-PS-DM-600W-24V-KO	2 x 300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	10.29"	6.79"	4.68"

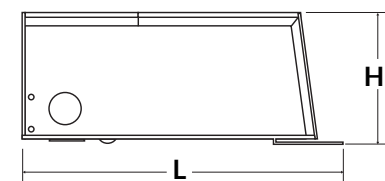
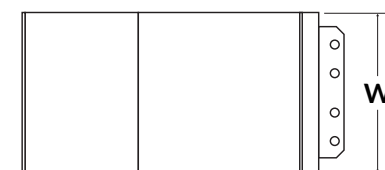


LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

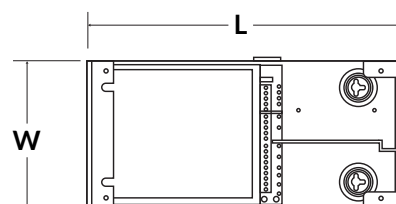

*Performance can be affected by driver loading and dimmer type.

CONTROLS (SOLD SEPARATELY)
