


STATIC WHITE 2.2W LED TAPELIGHT - IP65




TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	2.2W per foot
IP RATING	IP65 - wet locations. Not suitable for submersion, limited protection against harsh environments.
OUTPUT	2200K - 181 lm/ft 2700K - 187 lm/ft 3000K - 192 lm/ft 3500K - 196 lm/ft 4200K - 202 lm/ft 5200K - 207 lm/ft
INPUT VOLTAGE	24VDC
OPERATING TEMPERATURE	-13 ° to 140 ° F
CRI	90+
CUT LENGTH	Every 3.9", or every 6 LEDs
MAXIMUM RUN	50 feet
DIMENSIONS	0.39" W x 0.11" H (10mm x 2.8mm)
ADHESIVE BACKING	Yes - VHB
LIFESPAN	50,000 hrs
WARRANTY	3 year limited
POWER SUPPLY	Compatible with all 24VDC power supplies -- see page 4


LEAD TYPES

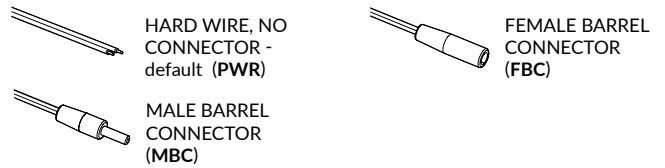

MOUNTING

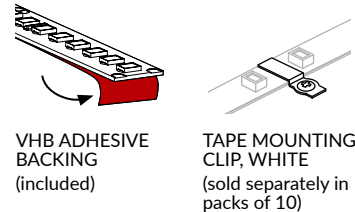

EXTRUSIONS



ORDERING GUIDE

← PRODUCT CODE						OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	CRI	LENGTH	POWER FEED	
LLI-L2.2W	65		24V	90		LEAD TYPE	LEAD LENGTH
		22K (181 lm/ft) 27K (187 lm/ft) 30K (192 lm/ft) 35K (196 lm/ft) 42K (202 lm/ft) 52K (207 lm/ft)			(enter length in inches, up to 600") R016* 16ft reel R050* 50ft reel	Default [blank] - 48" hard wire end feed (PWR48)	
						PWR Hard wire (no connector)	Enter desired wire length in inches
						MBC Male barrel connector	
						FBC Female barrel connector	
						N/A* No lead attached	


*Compatible with DIY connectors, see page 2

Example part number: LLI-L2.2W-65-35K-24V-90-96in
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).
*Reels do not include power feed unless specified.


STATIC WHITE 2.2W LED TAPELIGHT - IP65

DIY CONNECTORS (OPTIONAL)

Solderless connectors for quick in-field connection. DIY connectors are not compatible with all mounting extrusions. Reference [compatibility chart](#) for product compatibility.



TAPE-TO-TAPE
GRIPPER CONNECTOR,
BLACK/CLEAR
LLI-GCRD-LL-SC



TAPE-TO-WIRE
GRIPPER CONNECTOR,
BLACK/CLEAR
LLI-GCRD-LW-SC

OVERALL LENGTH / CUT POINT GUIDE

3.9"	7.9"	11.8"	15.7"	19.7"	23.6"	27.6"	31.5"	35.4"	39.4"	43.3"	47.2"
51.2"	55.1"	59.1"	63.0"	66.9"	70.9"	74.8"	78.7"	82.7"	86.6"	90.6"	94.5"
98.4"	102.4"	106.3"	110.2"	114.2"	118.1"	122.0"	126.0"	129.9"	133.9"	137.8"	141.7"
145.7"	149.6"	153.5"	157.5"	161.4"	165.4"	169.3"	173.2"	177.2"	181.1"	185.0"	189.0"
192.9"	196.9"	200.8"	204.7"	208.7"	212.6"	216.5"	220.5"	224.4"	228.3"	232.3"	236.2"
240.2"	244.1"	248.0"	252.0"	255.9"	259.8"	263.8"	267.7"	271.7"	275.6"	279.5"	283.5"
287.4"	291.3"	295.3"	299.2"	303.1"	307.1"	311.0"	315.0"	318.9"	322.8"	326.8"	330.7"
334.6"	338.6"	342.5"	346.5"	350.4"	354.3"	358.3"	362.2"	366.1"	370.1"	374.0"	378.0"
381.9"	385.8"	389.8"	393.7"	397.6"	401.6"	405.5"	409.4"	413.4"	417.3"	421.3"	425.2"
429.1"	433.1"	437.0"	440.9"	444.9"	448.8"	452.8"	456.7"	460.6"	464.6"	468.5"	472.4"
476.4"	480.3"	484.3"	488.2"	492.1"	496.1"	500.0"	503.9"	507.9"	511.8"	515.7"	519.7"
523.6"	527.6"	531.5"	535.4"	539.4"	543.3"	547.2"	551.2"	555.1"	559.1"	563.0"	566.9"
570.9"	574.8"	578.7"	582.7"	586.6"	590.6"	594.5"	598.4"				

STATIC WHITE 2.2W LED TAPELIGHT - IP65

EXTRUSIONS (OPTIONAL)

SURFACE			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Angled (ANG)		0.6" x 0.6"	Imaging
Angled 2 (ANG2)		1.2" x 1.2"	Semi-uniform
Aurora (AUR)		1.3" x 0.8"	Uniform
Closet Rod (CLR)		1.1" x 1.3"	Imaging
Deep (DEP)		0.6" x 0.7"	Semi-uniform
Deep Grazer (DEP-XG)		0.8" x 0.7"	Imaging
Dome (DOM)		0.8" x 0.8"	Semi-uniform
Deep Wide (DPW)		0.6" x 0.9"	Semi-uniform
Genesis (GEN)		0.9" x 0.8"	Semi-uniform
Grazer (GZR)		0.7" x 0.6"	Imaging
Icon 1 (IC1)		1.0" x 1.0"	Imaging
Icon 1 Louver (IC1L)		1.1 x 1.2"	Imaging
**Icon 2 (IC2)		1.4" x 2.0"	Uniform
Icon (ICN)		1.4" x 1.4"	Uniform
Icon Side (ICS)		1.7" x 1.4"	Uniform
Square (SQR)		0.5" x 0.6"	Imaging
Thin (THN)		0.3" x 0.7"	Imaging
Thin Glare Shield (THG)		0.6" x 0.7"	Imaging
Wide (WID)		0.4" x 0.9"	Imaging
Wide Double Glare Shield (WDG)		1.0" x 0.9"	Imaging

RECESSED			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Deep Flanged (DPF)		0.8" x 0.9"	Semi-uniform
Icon 1 Flanged (IC1F)		1.0" x 1.4"	Imaging
**Icon 2 Flanged (IC2F)		1.4" x 2.6"	Uniform
Icon Flanged (ICF)		1.4" x 2.0"	Uniform
In-Floor (IFL)		0.4" x 1.1"	Imaging
Seamless Border (SBD)		2.0" x 1.6"	Semi-uniform
Seamless Cove (SCV)		1.4" x 3.8"	Semi-uniform
Seamless Cove 2 (SCV2)		2.0" x 3.8"	Semi-uniform
Seamless Curve (SMC)		3.8" x 0.7"	Imaging
Seamless Edge (SME)		4.7" x 0.7"	Imaging
**Seamless Side Bend (SS1)		0.7" x 2.8"	Uniform
Seamless Top Bend (ST1)		0.7" x 2.8"	Imaging
Seamless 0.5 (SML)		0.7" x 2.1"	Semi-uniform
Seamless 1.0 (SM1)		0.6" x 2.4"	Imaging
**Seamless 1.5 (SM1.5)		0.8" x 3.4"	Semi-uniform
**Seamless 2.0 (SM2)		0.8" x 3.9"	Semi-uniform
Square Flanged (SQF)		0.5" x 0.9"	Imaging
Seamless Square Edge (SQE)		0.7" x 1.7"	Imaging
Seamless Wall Washer (SWW)		1.5" x 3.7"	Imaging
Thin Flanged (THF)		0.3" x 1.0"	Imaging
Wide Regressed (WDR)		1.0" x 1.2"	Imaging

ALL EXTRUSIONS

* Appearance of diodes varies depending on the Tapelight & Extrusion combination used. Diode visibility tested at 100% output with frosted lens. Diodes may become more visible as tapelight dims.




** Two rows of tapelight recommended. Tapelights are sidewall-mounted in Seamless 1.5 (SM1.5), Seamless 2.0 (SM2), and Seamless Side Bend (SS1)

DIMMABLE ELECTRONIC 0-10V 


Optimal performance dims to 0%.*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

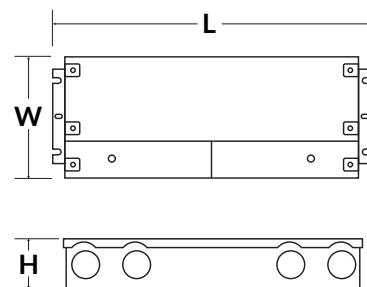

NON-DIMMABLE ELECTRONIC 


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

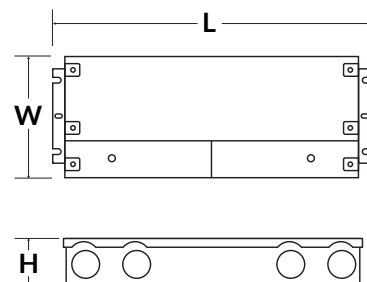


UNIVERSAL DIMMABLE ELECTRONIC FLICKER-FREE 

Optimal performance dims to 0-2%.


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDIMM-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.7"	1.6"
LLI-PS-UDIMM-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.7"	1.6"
LLI-PS-UDIMM-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDIMM-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.8"
LLI-PS-UDIMM-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDIMM-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.8"	4.3"	1.8"
LLI-PS-UDIMM-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

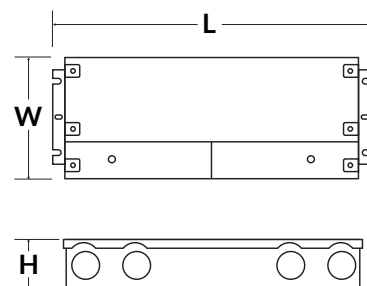

LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC 

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

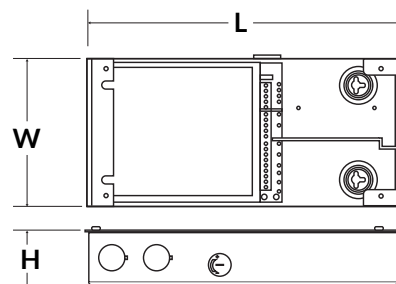

*Performance can be affected by driver loading and dimmer type.