


5MM 4.0W LED TAPELIGHT - IP20




TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	4.0W per foot
IP RATING	IP20 - dry locations
OUTPUT	2200K - 311 lm/ft 2700K - 322 lm/ft 3000K - 332 lm/ft 3500K - 347 lm/ft 4200K - 355 lm/ft 5200K - 360 lm/ft
INPUT VOLTAGE	24VDC
OPERATING TEMP.	-13° to 140° F
CRI	90+
CUT LENGTH	Every 1.5", or every 7 LEDs
MAXIMUM RUN	16 feet
DIMENSIONS	0.2" W x 0.08" H (5mm x 2mm)
ADHESIVE BACKING	Yes - VHB
LIFESPAN	50,000 hrs
WARRANTY	5 year limited
POWER SUPPLY	Compatible with all 24VDC power supplies - see page 3

LEAD TYPES

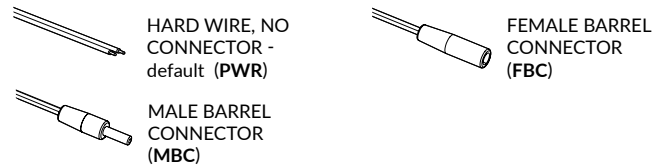

MOUNTING

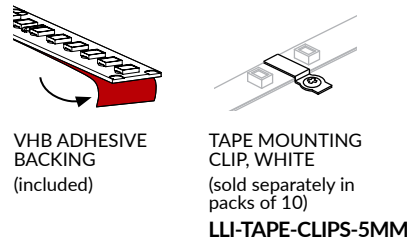

EXTRUSIONS



ORDERING GUIDE

← PRODUCT CODE							OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	CRI	WIDTH	LENGTH	LEAD TYPE LEAD LENGTH	
LLI-L4.0W	- 20		- 24V	- 90	- 5MM			
		22K (311 lm/ft) 27K (322 lm/ft) 30K (332 lm/ft) 35K (347 lm/ft) 42K (355 lm/ft) 52K (360 lm/ft)				(enter length in inches, up to 196")	Enter desired wire length in inches	
							PWR Hard wire (no connector) MBC Male barrel connector FBC Female barrel connector N/A No lead attached	

Example part number: LLI-L4.0W-20-27K-24V-90-5mm-96in
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).

5MM 4.0W LED TAPELIGHT - IP20

OVERALL LENGTH / CUT POINT GUIDE

1.51"	3.03"	4.54"	6.06"	7.57"	9.09"	10.60"	12.11"	13.63"	15.14"	16.66"	18.17"
19.68"	21.20"	22.71"	24.23"	25.74"	27.26"	28.77"	30.28"	31.80"	33.31"	34.83"	36.34"
37.85"	39.37"	40.88"	42.40"	43.91"	45.43"	46.94"	48.45"	49.97"	51.48"	53.00"	54.51"
56.02"	57.54"	59.05"	60.57"	62.08"	63.60"	65.11"	66.62"	68.14"	69.65"	71.17"	72.68"
74.19"	75.71"	77.22"	78.74"	80.25"	81.77"	83.28"	84.79"	86.31"	87.82"	89.34"	90.85"
92.36"	93.88"	95.39"	96.91"	98.42"	99.94"	101.45"	102.96"	104.48"	105.99"	107.51"	109.02"
110.53"	112.05"	113.56"	115.08"	116.59"	118.11"	119.62"	121.13"	122.65"	124.16"	125.68"	127.19"
128.70"	130.22"	131.73"	133.25"	134.76"	136.28"	137.79"	139.30"	140.82"	142.33"	143.85"	145.36"
146.87"	148.39"	149.90"	151.42"	152.93"	154.45"	155.96"	157.47"	158.99"	160.50"	162.02"	163.53"
165.04"	166.56"	168.07"	169.59"	171.10"	172.62"	174.13"	175.64"	177.16"	178.67"	180.19"	181.70"
183.22"	184.73"	186.24"	187.76"	189.27"	190.79"	192.30"	193.81"	195.33"	196.84"		


POWER SUPPLIES SOLD SEPARATELY

DIMMABLE ELECTRONIC 0-10V



Optimal performance dims to 0%.*


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

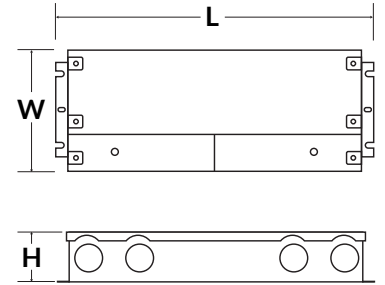

NON-DIMMABLE ELECTRONIC



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

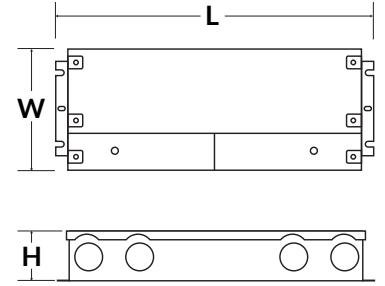


DIMMABLE ELECTRONIC FLICKER-FREE



Optimal performance dims to 2-5%.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"

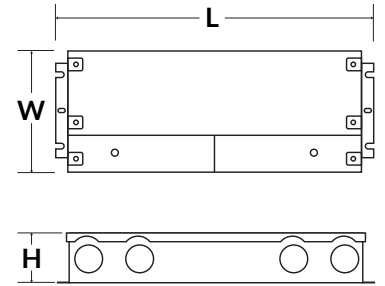


DIMMABLE MAGNETIC



Optimal performance dims to 5-10%.*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DM-020W-24V-KO	20W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-040W-24V-KO	40W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-100W-24V-KO	100W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-150W-24V-KO	150W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-CL2-KO	6 x 50W	120V or 277V	24V	CLASS 2	NEMA 3R WET	10.29"	5.69"	3.43"
LLI-PS-DM-600W-24V-KO	2 x 300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	10.29"	6.79"	4.68"

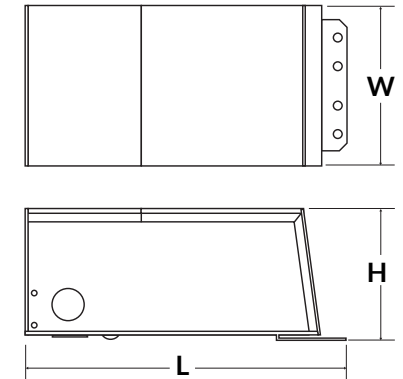


LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC



Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

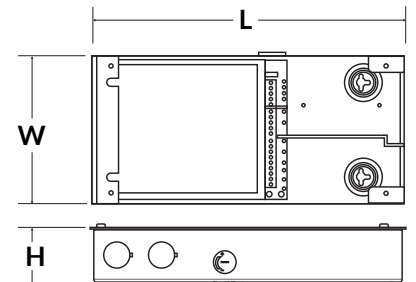

*Performance can be affected by driver loading and dimmer type.