


DOUBLE ROW 8.8W LED TAPELIGHT - IP65

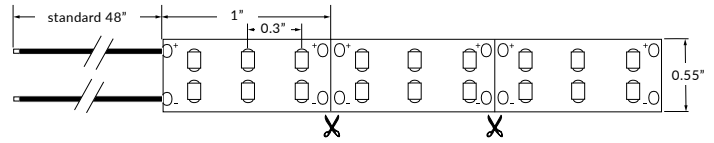


TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	8.8W per foot
IP RATING	IP65 - wet locations. Not suitable for submersion, limited protection against harsh environments.
OUTPUT	2200K - 488 lm/ft 2700K - 503 lm/ft 3000K - 518 lm/ft 3500K - 550 lm/ft 4200K - 582 lm/ft 5200K - 591 lm/ft
INPUT VOLTAGE	24VDC
OPERATING TEMP.	-13° to 140° F
CRI	90+
CUT LENGTH	Every 1", or every 3 LED rows
MAXIMUM RUN	32 feet
DIMENSIONS	0.55" W x 0.11" H (14mm x 2.8mm)
ADHESIVE BACKING	Yes - VHB
LIFESPAN	50,000 hrs
WARRANTY	3 year limited
POWER SUPPLY	Compatible with all 24VDC power supplies -- see page 4

LEAD TYPES

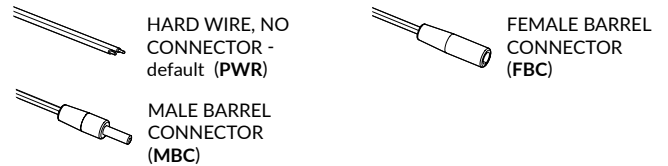


MOUNTING



VHB ADHESIVE BACKING (included)

EXTRUSIONS



ARCHITECTURAL EXTRUSIONS (sold separately, see page 3, or see [website](#) for all options)

ORDERING GUIDE

← PRODUCT CODE						OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	CRI	LENGTH	POWER FEED	
LLI-L8.8W	65		24V	90		LEAD TYPE	LEAD LENGTH
		22K (488 lm/ft)			(enter length in inches, up to 384")		
		27K (503 lm/ft)					
		30K (518 lm/ft)					
		35K (550 lm/ft)					
		42K (582 lm/ft)					
		52K (591 lm/ft)					
Example part number: LLI-L8.8W-65-35K-24V-90-96in						Default [blank] - 48" hard wire end feed (PWR48)	
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).						PWR Hard wire (no connector) Enter desired wire length in inches MBC Male barrel connector FBC Female barrel connector N/A No lead attached	









DOUBLE ROW 8.8W LED TAPELIGHT - IP65






OVERALL LENGTH / CUT POINT GUIDE

2.0"	3.9"	5.9"	7.9"	9.8"	11.8"	13.8"	15.7"	17.7"	19.7"	21.7"	23.6"
25.6"	27.6"	29.5"	31.5"	33.5"	35.4"	37.4"	39.4"	41.3"	43.3"	45.3"	47.2"
49.2"	51.2"	53.1"	55.1"	57.1"	59.1"	61.0"	63.0"	65.0"	66.9"	68.9"	70.9"
72.8"	74.8"	76.8"	78.7"	80.7"	82.7"	84.6"	86.6"	88.6"	90.6"	92.5"	94.5"
96.5"	98.4"	100.4"	102.4"	104.3"	106.3"	108.3"	110.2"	112.2"	114.2"	116.1"	118.1"
120.1"	122.0"	124.0"	126.0"	128.0"	129.9"	131.9"	133.9"	135.8"	137.8"	139.8"	141.7"
143.7"	145.7"	147.6"	149.6"	151.6"	153.5"	155.5"	157.5"	159.4"	161.4"	163.4"	165.4"
167.3"	169.3"	171.3"	173.2"	175.2"	177.2"	179.1"	181.1"	183.1"	185.0"	187.0"	189.0"
190.9"	192.9"	194.9"	196.9"	198.8"	200.8"	202.8"	204.7"	206.7"	208.7"	210.6"	212.6"
214.6"	216.5"	218.5"	220.5"	222.4"	224.4"	226.4"	228.3"	230.3"	232.3"	234.3"	236.2"
238.2"	240.2"	242.1"	244.1"	246.1"	248.0"	250.0"	252.0"	253.9"	255.9"	257.9"	259.8"
261.8"	263.8"	265.7"	267.7"	269.7"	271.7"	273.6"	275.6"	277.6"	279.5"	281.5"	283.5"
285.4"	287.4"	289.4"	291.3"	293.3"	295.3"	297.2"	299.2"	301.2"	303.1"	305.1"	307.1"
309.1"	311.0"	313.0"	315.0"	316.9"	318.9"	320.9"	322.8"	324.8"	326.8"	328.7"	330.7"
332.7"	334.6"	336.6"	338.6"	340.6"	342.5"	344.5"	346.5"	348.4"	350.4"	352.4"	354.3"
356.3"	358.3"	360.2"	362.2"	364.2"	366.1"	368.1"	370.1"	372.0"	374.0"	376.0"	378.0"
379.9"	381.9"	383.9"									

DOUBLE ROW 8.8W LED TAPELIGHT - IP65

EXTRUSIONS (OPTIONAL)

SURFACE			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Angled 2 (ANG2)		1.2" x 1.2"	Uniform
Aurora (AUR)		1.3" x 0.8"	Uniform
Dome (DOM)		0.8" x 0.8"	Uniform
Deep Wide (DPW)		0.6" x 0.9"	Uniform
Genesis (GEN)		0.9" x 0.8"	Uniform
Icon (ICN)		1.4" x 1.4"	Uniform
Icon Side (ICS)		1.7" x 1.4"	Uniform
Wide (WID)		0.4" x 0.9"	Semi-uniform

RECESSED			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Icon Flanged (ICF)		1.4" x 2.0"	Uniform
Seamless Cove (SCV)		1.4" x 3.8"	Uniform
Seamless Cove 2 (SCV2)		2.0" x 3.8"	Uniform
Seamless 1.0 (SM1)		0.6" x 2.4"	Uniform
Seamless Wall Washer (SWW)		1.5" x 3.7"	Uniform

* Appearance of diodes varies depending on the Tapelight & Extrusion combination used. Diode visibility tested at 100% output with frosted lens. Diodes may become more visible as tapelight dims.



ALL EXTRUSIONS




POWER SUPPLIES SOLD SEPARATELY

DIMMABLE ELECTRONIC 0-10V



Optimal performance dims to 0%.*


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

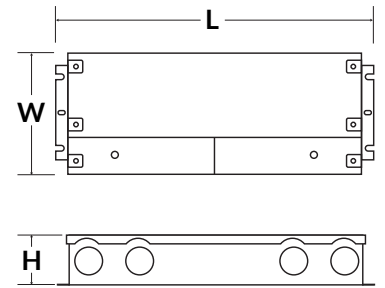

NON-DIMMABLE ELECTRONIC



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

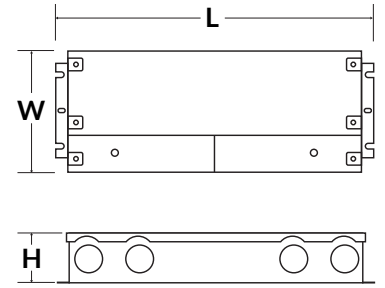


DIMMABLE ELECTRONIC FLICKER-FREE



Optimal performance dims to 2-5%.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"

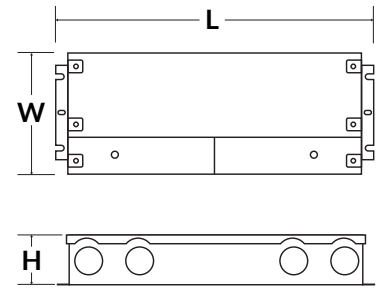


DIMMABLE MAGNETIC



Optimal performance dims to 5-10%.*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DM-020W-24V-KO	20W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-040W-24V-KO	40W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-100W-24V-KO	100W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-150W-24V-KO	150W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-CL2-KO	6 x 50W	120V or 277V	24V	CLASS 2	NEMA 3R WET	10.29"	5.69"	3.43"
LLI-PS-DM-600W-24V-KO	2 x 300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	10.29"	6.79"	4.68"

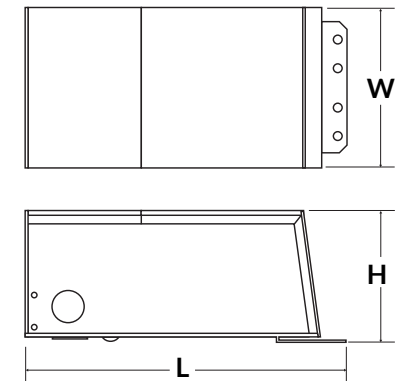


LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC



Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

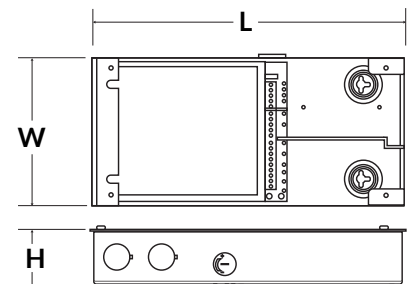

*Performance can be affected by driver loading and dimmer type.