


ASYMMETRIC LED TAPELIGHT - IP65




TECHNICAL INFORMATION

NOTE: All data has +/- 5% tolerance.


WATTAGE	4.4W per foot
IP RATING	IP65 - wet location. Not suitable for submersion, limited protection against harsh environments.
OUTPUT	2700K - 461 lm/ft 3000K - 483 lm/ft 3500K - 496 lm/ft 4200K - 509 lm/ft 5200K - 505 lm/ft
BEAM	25° beam angle with 10° asymmetric offset
INPUT VOLTAGE	24VDC
CRI	90+
OPERATING TEMP.	-4° to 140° F
CUT LENGTH	Every 1.97"
MAXIMUM RUN	16 feet
DIMENSIONS	0.83" W x 0.41" H
MINIMUM BEND	3.93" diameter
LIFESPAN	50,000 hrs
WARRANTY	3 year limited
POWER SUPPLY	Compatible with all 24VDC power supplies -- see page 4

LEAD TYPES

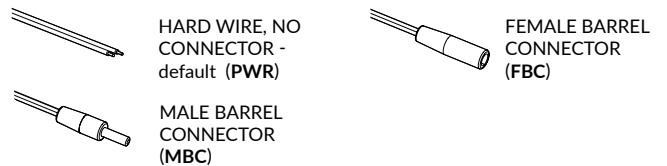

MOUNTING

See page 2 for details. 2 clips recommended per 12in of tapelight. Sold separately.

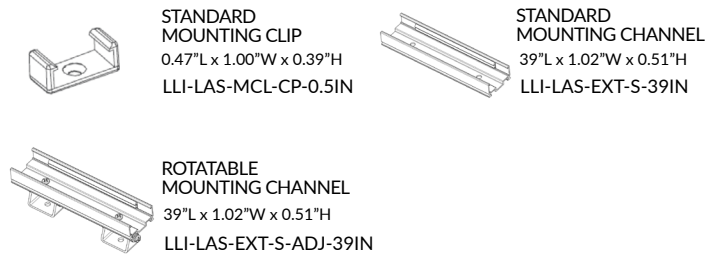

PART NUMBER BUILDER / ORDERING GUIDE

← PRODUCT CODE

SERIES	IP RATING	COLOR	VOLTAGE	LENGTH
LLI-LAS4.4W	65		24V	
		27K - (461 lm/ft)		(enter length in inches, up to 192")
		30K - (483 lm/ft)		
		35K - (496 lm/ft)		
		42K - (509 lm/ft)		
		52K - (505 lm/ft)		

OPTIONAL CODE →

POWER FEED	
LEAD TYPE	LEAD LENGTH

Default [blank] - 48" hard wire end feed (PWR48)

PWR Hard wire (no connector) Enter desired wire length in inches

MBC Male barrel connector

FBC Female barrel connector

N/A No lead attached

Example part number: LLI-LAS4.4W-65-35K-24V-96in
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).

ASYMMETRIC LED TAPELIGHT - IP65


OVERALL LENGTH / CUT POINT GUIDE

2.6"	4.5"	6.5"	8.5"	10.4"	12.4"	14.4"	16.3"	18.3"	20.3"	22.2"	24.2"
26.2"	28.1"	30.1"	32.1"	34.1"	36.0"	38.0"	40.0"	41.9"	43.9"	45.9"	47.8"
49.8"	51.8"	53.7"	55.7"	57.7"	59.6"	61.6"	63.6"	65.6"	67.5"	69.5"	71.5"
73.4"	75.4"	77.4"	79.3"	81.3"	83.3"	85.2"	87.2"	89.2"	91.1"	93.1"	95.1"
97.0"	99.0"	101.0"	103.0"	104.9"	106.9"	108.9"	110.8"	112.8"	114.8"	116.7"	118.7"
120.7"	122.6"	124.6"	126.6"	128.5"	130.5"	132.5"	134.4"	136.4"	138.4"	140.4"	142.3"
144.3"	146.3"	148.2"	150.2"	152.2"	154.1"	156.1"	158.1"	160.0"	162.0"	164.0"	165.9"
167.9"	169.9"	171.9"	173.8"	175.8"	177.8"	179.7"	181.7"	183.7"	185.6"	187.6"	189.6"
191.5"											

MOUNTING CHANNELS AND CLIPS (SOLD SEPARATELY)

NOTE: Leave a 0.5" to 1" gap between tapelight power feed and mounting channel, to avoid undue stress on power feed cables.

MOUNTING CLIP - CLEAR PLASTIC




Mounting Clip

Recommended 2 clips every 12"

Part Number: LLI-LAS-MCL-CP-0.5IN

Dimensions: 0.47"L x 1.00"W x 0.39"H

STANDARD ALUMINUM SILICONE GRIP MOUNTING CHANNEL - SILVER ANODIZED

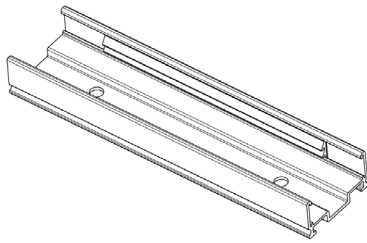


39" Mounting Channel

Part Number: LLI-LAS-EXT-S-39IN

Dimensions: 39"L x 1.02"W x 0.51"H

ROTATABLE ALUMINUM SILICONE GRIP MOUNTING CHANNEL - SILVER ANODIZED

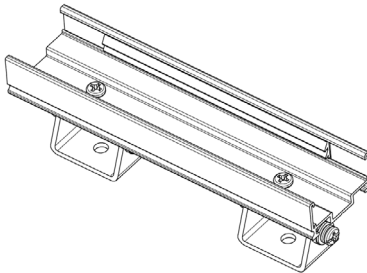

39" Mounting Channel


150° adjustable rotation

Part Number: LLI-LAS-EXT-S-ADJ-39IN


Dimensions: 39"L x 1.02"W x 0.51"H

ASYMMETRIC LED TAPELIGHT - IP65


BEAM DETAILS

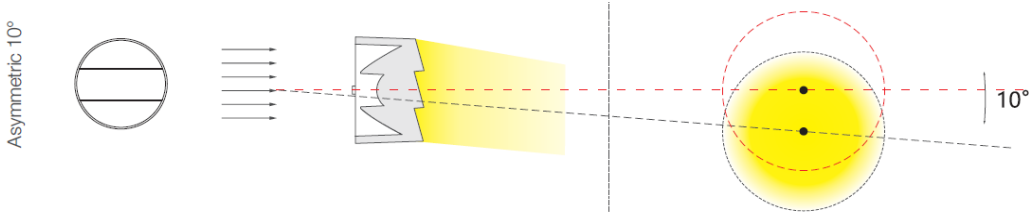

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

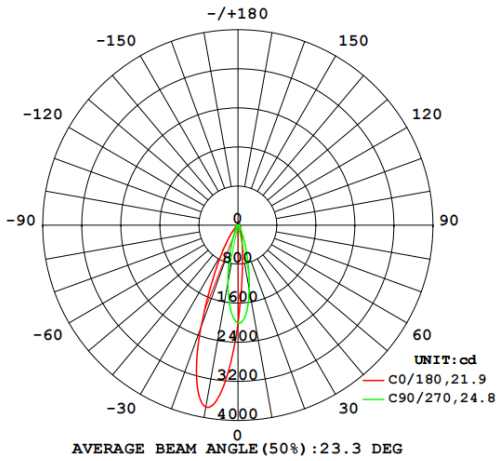


C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

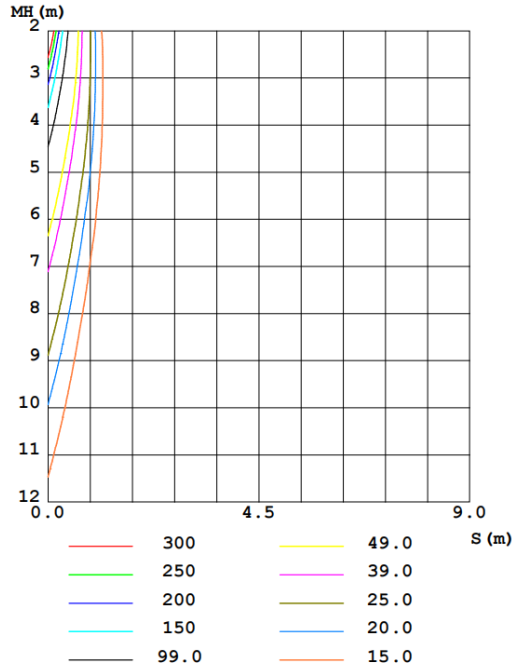

WARNING


Do not fold, crease, or twist LED tapelight

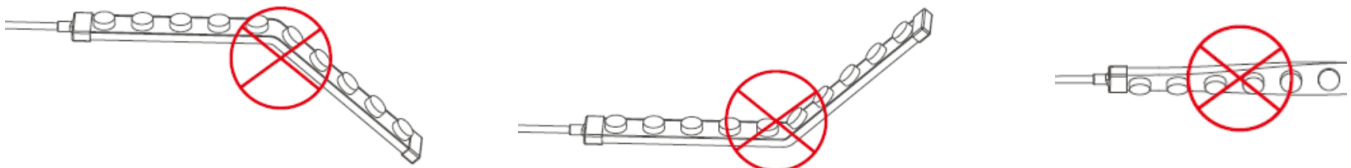

DIMMABLE ELECTRONIC 0-10V 


Optimal performance dims to 0%.*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

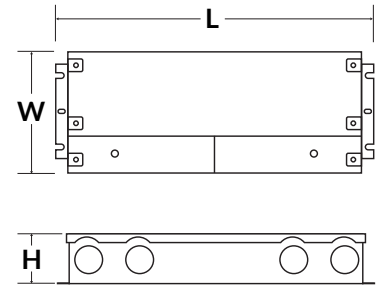

NON-DIMMABLE ELECTRONIC 


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

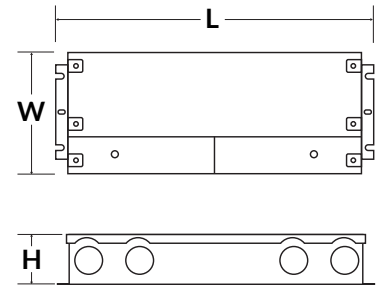


UNIVERSAL DIMMABLE ELECTRONIC FLICKER-FREE 

Optimal performance dims to 0-2%.


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDIMM-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.7"	1.6"
LLI-PS-UDIMM-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.7"	1.6"
LLI-PS-UDIMM-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDIMM-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.8"
LLI-PS-UDIMM-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDIMM-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.8"	4.3"	1.8"
LLI-PS-UDIMM-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

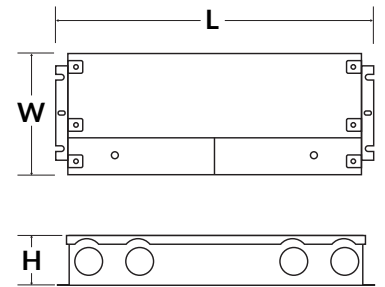

LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC 

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

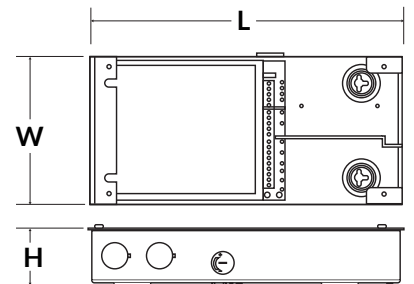

*Performance can be affected by driver loading and dimmer type.