


SINGLE COLOR 4.4W LED TAPELIGHT - IP65

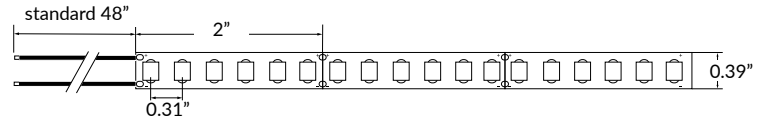


TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	4.4W per foot												
IP RATING	IP65 - wet locations. Not suitable for submersion, limited protection against harsh environments.												
OUTPUT	<table border="1"> <tr> <td>Red (620-625nm)</td> <td>103 lm/ft</td> </tr> <tr> <td>Green (520-525nm)</td> <td>301 lm/ft</td> </tr> <tr> <td>Blue (465-470nm)</td> <td>80 lm/ft</td> </tr> <tr> <td>Amber (588-590nm)</td> <td>91 lm/ft</td> </tr> <tr> <td>Orange (600-605nm)</td> <td>82 lm/ft</td> </tr> <tr> <td>Pink</td> <td>99 lm/ft</td> </tr> </table>	Red (620-625nm)	103 lm/ft	Green (520-525nm)	301 lm/ft	Blue (465-470nm)	80 lm/ft	Amber (588-590nm)	91 lm/ft	Orange (600-605nm)	82 lm/ft	Pink	99 lm/ft
Red (620-625nm)	103 lm/ft												
Green (520-525nm)	301 lm/ft												
Blue (465-470nm)	80 lm/ft												
Amber (588-590nm)	91 lm/ft												
Orange (600-605nm)	82 lm/ft												
Pink	99 lm/ft												
INPUT VOLTAGE	24VDC												
OPERATING TEMP.	-13 ° to 140 ° F												
CUT LENGTH	Every 2", or every 6 LEDs												
MAXIMUM RUN	32 feet												
DIMENSIONS	0.39" W x 0.11" H (10mm x 2.8mm)												
ADHESIVE BACKING	Yes - VHB												
LIFESPAN	50,000 hrs												
WARRANTY	3 year limited												
POWER SUPPLY	Compatible with all 24VDC power supplies -- see page 3												

LEAD TYPES

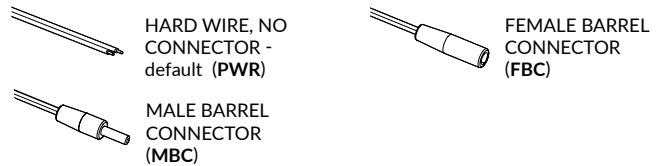

MOUNTING

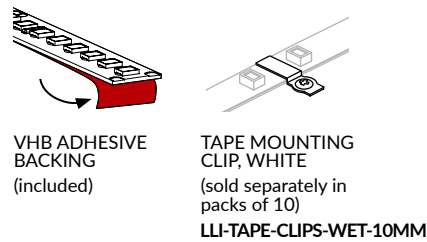

EXTRUSIONS



ORDERING GUIDE

← PRODUCT CODE					OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	LENGTH	POWER FEED	
LLI-LC4.4W	65	[]	24V	[]	LEAD TYPE	LEAD LENGTH
		RED GRN BLU AMB ORG PNK		(enter length in inches, up to 384") R016* 16ft reel R050* 50ft reel	[]	[]
					Default [blank] - 48" hard wire end feed (PWR48)	
					PWR Hard wire (no connector)	Enter desired wire length in inches
					MBC Male barrel connector	
					FBC Female barrel connector	
					N/A* No lead attached	

Example part number: LLI-LC4.4W-65-RED-24V-96in
 Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).
 *Reels do not include power feed unless specified.

*Compatible with DIY connectors, see page 2

SINGLE COLOR 4.4W LED TAPELIGHT - IP65

OVERALL LENGTH / CUT POINT GUIDE

2.0"	3.9"	5.9"	7.9"	9.8"	11.8"	13.8"	15.7"	17.7"	19.7"	21.7"	23.6"
25.6"	27.6"	29.5"	31.5"	33.5"	35.4"	37.4"	39.4"	41.3"	43.3"	45.3"	47.2"
49.2"	51.2"	53.1"	55.1"	57.1"	59.1"	61.0"	63.0"	65.0"	66.9"	68.9"	70.9"
72.8"	74.8"	76.8"	78.7"	80.7"	82.7"	84.6"	86.6"	88.6"	90.6"	92.5"	94.5"
96.5"	98.4"	100.4"	102.4"	104.3"	106.3"	108.3"	110.2"	112.2"	114.2"	116.1"	118.1"
120.1"	122.0"	124.0"	126.0"	128.0"	129.9"	131.9"	133.9"	135.8"	137.8"	139.8"	141.7"
143.7"	145.7"	147.6"	149.6"	151.6"	153.5"	155.5"	157.5"	159.4"	161.4"	163.4"	165.4"
167.3"	169.3"	171.3"	173.2"	175.2"	177.2"	179.1"	181.1"	183.1"	185.0"	187.0"	189.0"
190.9"	192.9"	194.9"	196.9"	198.8"	200.8"	202.8"	204.7"	206.7"	208.7"	210.6"	212.6"
214.6"	216.5"	218.5"	220.5"	222.4"	224.4"	226.4"	228.3"	230.3"	232.3"	234.3"	236.2"
238.2"	240.2"	242.1"	244.1"	246.1"	248.0"	250.0"	252.0"	253.9"	255.9"	257.9"	259.8"
261.8"	263.8"	265.7"	267.7"	269.7"	271.7"	273.6"	275.6"	277.6"	279.5"	281.5"	283.5"
285.4"	287.4"	289.4"	291.3"	293.3"	295.3"	297.2"	299.2"	301.2"	303.1"	305.1"	307.1"
309.1"	311.0"	313.0"	315.0"	316.9"	318.9"	320.9"	322.8"	324.8"	326.8"	328.7"	330.7"
332.7"	334.6"	336.6"	338.6"	340.6"	342.5"	344.5"	346.5"	348.4"	350.4"	352.4"	354.3"
356.3"	358.3"	360.2"	362.2"	364.2"	366.1"	368.1"	370.1"	372.0"	374.0"	376.0"	378.0"
379.9"	381.9"	383.9"									


POWER SUPPLIES SOLD SEPARATELY

DIMMABLE ELECTRONIC 0-10V

Optimal performance dims to 0%.*




PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

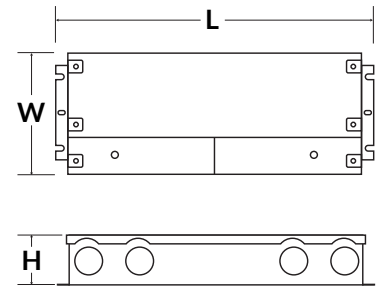

NON-DIMMABLE ELECTRONIC



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

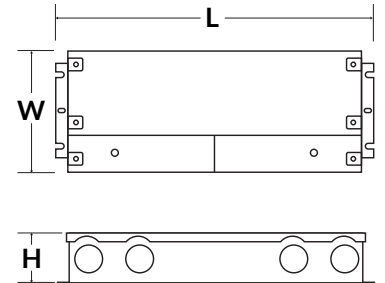


DIMMABLE ELECTRONIC FLICKER-FREE

Optimal performance dims to 2-5%.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"

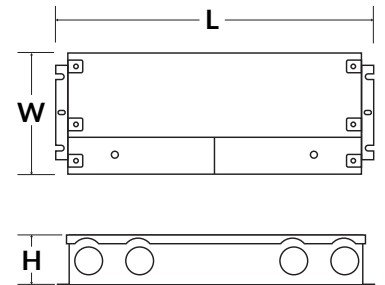


DIMMABLE MAGNETIC

Optimal performance dims to 5-10%.*



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DM-020W-24V-KO	20W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-040W-24V-KO	40W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-100W-24V-KO	100W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-150W-24V-KO	150W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-CL2-KO	6 x 50W	120V or 277V	24V	CLASS 2	NEMA 3R WET	10.29"	5.69"	3.43"
LLI-PS-DM-600W-24V-KO	2 x 300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	10.29"	6.79"	4.68"

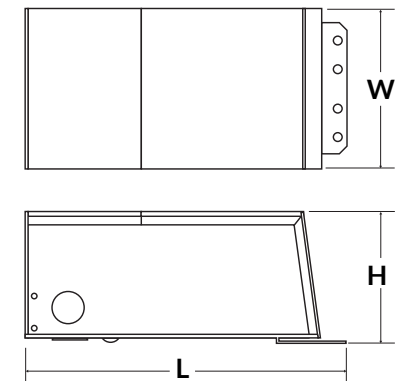


LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

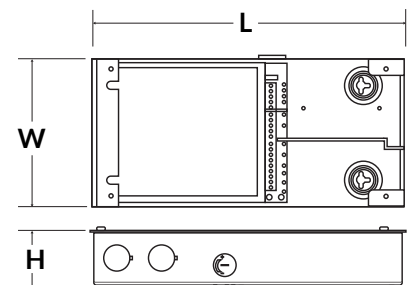

*Performance can be affected by driver loading and dimmer type.