



# 10MM COB 4.6W LED TAPELIGHT - IP67

## OVERALL LENGTH / CUT POINT GUIDE

|        |        |        |        |        |        |        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 1.7"   | 2.3"   | 3.0"   | 3.6"   | 4.3"   | 4.9"   | 5.6"   | 6.3"   | 6.9"   | 7.6"   | 8.2"   | 8.9"   |
| 9.5"   | 10.2"  | 10.8"  | 11.5"  | 12.2"  | 12.8"  | 13.5"  | 14.1"  | 14.8"  | 15.4"  | 16.1"  | 16.8"  |
| 17.4"  | 18.1"  | 18.7"  | 19.4"  | 20.0"  | 20.7"  | 21.3"  | 22.0"  | 22.7"  | 23.3"  | 24.0"  | 24.6"  |
| 25.3"  | 25.9"  | 26.6"  | 27.3"  | 27.9"  | 28.6"  | 29.2"  | 29.9"  | 30.5"  | 31.2"  | 31.8"  | 32.5"  |
| 33.2"  | 33.8"  | 34.5"  | 35.1"  | 35.8"  | 36.4"  | 37.1"  | 37.8"  | 38.4"  | 39.1"  | 39.7"  | 40.4"  |
| 41.0"  | 41.7"  | 42.3"  | 43.0"  | 43.7"  | 44.3"  | 45.0"  | 45.6"  | 46.3"  | 46.9"  | 47.6"  | 48.3"  |
| 48.9"  | 49.6"  | 50.2"  | 50.9"  | 51.5"  | 52.2"  | 52.8"  | 53.5"  | 54.2"  | 54.8"  | 55.5"  | 56.1"  |
| 56.8"  | 57.4"  | 58.1"  | 58.8"  | 59.4"  | 60.1"  | 60.7"  | 61.4"  | 62.0"  | 62.7"  | 63.3"  | 64.0"  |
| 64.7"  | 65.3"  | 66.0"  | 66.6"  | 67.3"  | 67.9"  | 68.6"  | 69.3"  | 69.9"  | 70.6"  | 71.2"  | 71.9"  |
| 72.5"  | 73.2"  | 73.8"  | 74.5"  | 75.2"  | 75.8"  | 76.5"  | 77.1"  | 77.8"  | 78.4"  | 79.1"  | 79.8"  |
| 80.4"  | 81.1"  | 81.7"  | 82.4"  | 83.0"  | 83.7"  | 84.4"  | 85.0"  | 85.7"  | 86.3"  | 87.0"  | 87.6"  |
| 88.3"  | 88.9"  | 89.6"  | 90.3"  | 90.9"  | 91.6"  | 92.2"  | 92.9"  | 93.5"  | 94.2"  | 94.9"  | 95.5"  |
| 96.2"  | 96.8"  | 97.5"  | 98.1"  | 98.8"  | 99.4"  | 100.1" | 100.8" | 101.4" | 102.1" | 102.7" | 103.4" |
| 104.0" | 104.7" | 105.4" | 106.0" | 106.7" | 107.3" | 108.0" | 108.6" | 109.3" | 109.9" | 110.6" | 111.3" |
| 111.9" | 112.6" | 113.2" | 113.9" | 114.5" | 115.2" | 115.9" | 116.5" | 117.2" | 117.8" | 118.5" | 119.1" |
| 119.8" | 120.4" | 121.1" | 121.8" | 122.4" | 123.1" | 123.7" | 124.4" | 125.0" | 125.7" | 126.4" | 127.0" |
| 127.7" | 128.3" | 129.0" | 129.6" | 130.3" | 130.9" | 131.6" | 132.3" | 132.9" | 133.6" | 134.2" | 134.9" |
| 135.5" | 136.2" | 136.9" | 137.5" | 138.2" | 138.8" | 139.5" | 140.1" | 140.8" | 141.4" | 142.1" | 142.8" |
| 143.4" | 144.1" | 144.7" | 145.4" | 146.0" | 146.7" | 147.4" | 148.0" | 148.7" | 149.3" | 150.0" | 150.6" |
| 151.3" | 151.9" | 152.6" | 153.3" | 153.9" | 154.6" | 155.2" | 155.9" | 156.5" | 157.2" | 157.9" | 158.5" |
| 159.2" | 159.8" | 160.5" | 161.1" | 161.8" | 162.4" | 163.1" | 163.8" | 164.4" | 165.1" | 165.7" | 166.4" |
| 167.0" | 167.7" | 168.4" | 169.0" | 169.7" | 170.3" | 171.0" | 171.6" | 172.3" | 173.0" | 173.6" | 174.3" |
| 174.9" | 175.6" | 176.2" | 176.9" | 177.5" | 178.2" | 178.9" | 179.5" | 180.2" | 180.8" | 181.5" | 182.1" |
| 182.8" | 183.5" | 184.1" | 184.8" | 185.4" | 186.1" | 186.7" | 187.4" | 188.0" | 188.7" | 189.4" | 190.0" |
| 190.7" | 191.3" | 192.0" | 192.6" | 193.3" | 194.0" | 194.6" | 195.3" | 195.9" | 196.6" | 197.2" | 197.9" |

# 10MM COB 4.6W LED TAPELIGHT - IP67

## EXTRUSIONS (OPTIONAL)

| SURFACE         |   |             |             |
|-----------------|---|-------------|-------------|
| EXTRUSION       | PROFILE   | H x W (IN)  | APPEARANCE* |
| Angled 2 (ANG2) |  | 1.2" x 1.2" | Uniform     |
| Dome (DOM)      |  | 0.8" x 0.8" | Uniform     |
| Deep Wide (DPW) |  | 0.6" x 0.9" | Uniform     |
| Icon 1 (IC1)    |  | 1.0" X 1.0" | Uniform     |
| **Icon 2 (IC2)  |  | 1.4" x 2.0" | Uniform     |
| Icon (ICN)      |  | 1.4" x 1.4" | Uniform     |
| Icon Side (ICS) |  | 1.7" x 1.4" | Uniform     |

| RECESSED                   |  |             |             |
|----------------------------|--|-------------|-------------|
| EXTRUSION                  | PROFILE  | H x W (IN)  | APPEARANCE* |
| Icon 1 Flanged (IC1F)      |  | 1.0" X 1.4" | Uniform     |
| **Icon 2 Flanged (IC2F)    |  | 1.4" x 2.6" | Uniform     |
| Icon Flanged (ICF)         |  | 1.4" x 2.0" | Uniform     |
| Seamless Cove (SCV)        |  | 1.4" x 3.8" | Uniform     |
| Seamless Cove 2 (SCV2)     |  | 2.0" x 3.8" | Uniform     |
| Seamless 1.0 (SM1)         |  | 0.6" x 2.4" | Uniform     |
| Seamless Wall Washer (SWW) |  | 1.5" x 3.7" | Uniform     |

\* Appearance of diodes varies depending on the Tapelight & Extrusion combination used. Diode visibility tested at 100% output with frosted lens. Diodes may become more visible as tapelight dims.



\*\* Two rows of tapelight recommended. Tapelights are sidewall-mounted in Seamless 1.5 (SM1.5) and Seamless 2.0 (SM2).


ALL EXTRUSIONS



**DIMMABLE ELECTRONIC 0-10V** 


Optimal performance dims to 0%.\*

| PART NUMBER                  | CAPACITY | INPUT        | OUTPUT | CLASS   | LOCATION | L     | W    | H    |
|------------------------------|----------|--------------|--------|---------|----------|-------|------|------|
| LLI-PS-DE010-030W-24V-KO     | 30W      | 120V or 277V | 24V    | CLASS 2 | IP66 WET | 6.5"  | 3.6" | 1.6" |
| LLI-PS-DE010-060W-24V-KO     | 60W      | 120V or 277V | 24V    | CLASS 2 | IP66 WET | 7.4"  | 3.6" | 1.6" |
| LLI-PS-DE010-096W-24V-KO     | 96W      | 120V or 277V | 24V    | CLASS 2 | IP66 WET | 8.7"  | 3.7" | 1.7" |
| LLI-PS-DE010-192W-24V-CL2-KO | 2x96W    | 120V or 277V | 24V    | CLASS 2 | IP66 WET | 10.9" | 4.3" | 1.9" |
| LLI-PS-DE010-200W-24V-KO     | 200W     | 120V or 277V | 24V    | CLASS 1 | IP66 WET | 10.2" | 4.1" | 1.8" |
| LLI-PS-DE010-288W-24V-CL2-KO | 3x96W    | 120V or 277V | 24V    | CLASS 2 | IP66 WET | 11.9" | 4.3" | 1.9" |
| LLI-PS-DE010-300W-24V-KO     | 300W     | 120V or 277V | 24V    | CLASS 1 | IP66 WET | 10.9" | 4.3" | 1.8" |

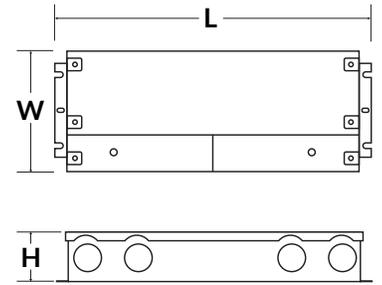

**NON-DIMMABLE ELECTRONIC** 


| PART NUMBER                | CAPACITY | INPUT    | OUTPUT | CLASS   | LOCATION | L     | W    | H     |
|----------------------------|----------|----------|--------|---------|----------|-------|------|-------|
| LLI-PS-NDE-030W-24V-KO     | 30W      | 100-277V | 24V    | CLASS 2 | IP66 WET | 6.5"  | 3.5" | 1.02" |
| LLI-PS-NDE-060W-24V-KO     | 60W      | 100-277V | 24V    | CLASS 2 | IP66 WET | 7.4"  | 3.5" | 1.2"  |
| LLI-PS-NDE-096W-24V-KO     | 96W      | 100-277V | 24V    | CLASS 2 | IP66 WET | 8.7"  | 3.7" | 1.7"  |
| LLI-PS-NDE-192W-24V-CL2-KO | 2x96W    | 100-277V | 24V    | CLASS 2 | IP66 WET | 10.9" | 4.1" | 1.9"  |
| LLI-PS-NDE-200W-24V-KO     | 200W     | 100-277V | 24V    | CLASS 1 | IP66 WET | 10.3" | 4.1" | 1.8"  |
| LLI-PS-NDE-288W-24V-CL2-KO | 3x96W    | 100-277V | 24V    | CLASS 2 | IP66 WET | 11.9" | 4.1" | 1.9"  |
| LLI-PS-NDE-300W-24V-KO     | 300W     | 100-277V | 24V    | CLASS 1 | IP66 WET | 10.9" | 4.3" | 1.8"  |

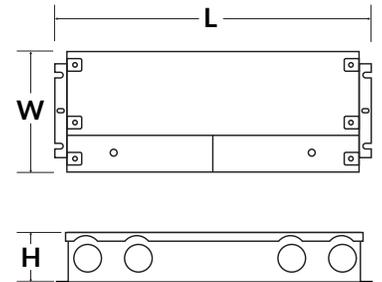

**UNIVERSAL DIMMABLE ELECTRONIC FLICKER-FREE** 

Optimal performance dims to 0-2%.


| PART NUMBER                  | CAPACITY | INPUT    | OUTPUT | CLASS   | LOCATION | L     | W    | H    |
|------------------------------|----------|----------|--------|---------|----------|-------|------|------|
| LLI-PS-UDIMM-030W-24V-KO     | 30W      | 110-277V | 24V    | CLASS 2 | IP66 WET | 6.5"  | 3.6" | 1.0" |
| LLI-PS-UDIMM-060W-24V-KO     | 60W      | 110-277V | 24V    | CLASS 2 | IP66 WET | 7.4"  | 3.6" | 1.0" |
| LLI-PS-UDIMM-096W-24V-KO     | 96W      | 110-277V | 24V    | CLASS 2 | IP66 WET | 8.7"  | 3.7" | 1.6" |
| LLI-PS-UDIMM-192W-24V-CL2-KO | 2x96W    | 110-277V | 24V    | CLASS 2 | IP66 WET | 10.9" | 4.3" | 1.9" |
| LLI-PS-UDIMM-200W-24V-KO     | 200W     | 110-277V | 24V    | CLASS 1 | IP66 WET | 10.2" | 4.1" | 1.8" |
| LLI-PS-UDIMM-288W-24V-CL2-KO | 3x96W    | 110-277V | 24V    | CLASS 2 | IP66 WET | 11.9" | 4.3" | 1.9" |
| LLI-PS-UDIMM-300W-24V-KO     | 300W     | 110-277V | 24V    | CLASS 1 | IP66 WET | 11.0" | 4.3" | 1.8" |

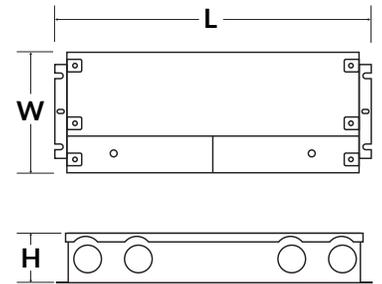

**LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC** 

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

| PART NUMBER   | CAPACITY | INPUT    | OUTPUT | CLASS   | LOCATION | L     | W    | H    |
|---------------|----------|----------|--------|---------|----------|-------|------|------|
| L3D0-96W24V-U | 96W      | 120-277V | 24V    | CLASS 2 | IP20 DRY | 10.5" | 5.5" | 2.0" |

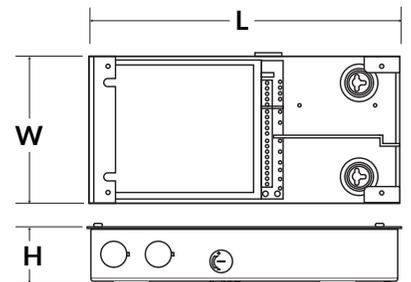

\*Performance can be affected by driver loading and dimmer type.