


# STATIC WHITE INDIVIDUAL CUT 5.9W LED TAPELIGHT - IP20

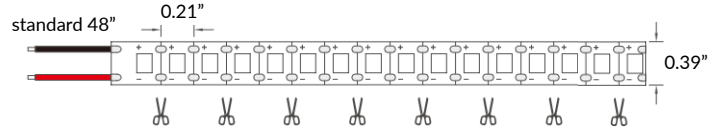


## TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	5.9W per foot
IP RATING	IP20 - dry locations
OUTPUT	2700K - 790 lm/ft 3000K - 813 lm/ft 3500K - 831 lm/ft 4000K - 860 lm/ft 5000K - 860 lm/ft
INPUT VOLTAGE	24VDC
OPERATING TEMP.	-4° to 104° F
CRI	90+
CUT LENGTH	Every 0.21", or every 1 LED
MAXIMUM RUN	16 feet
DIMENSIONS	0.39" W x 0.07" H (10mm x 1.8mm)
ADHESIVE BACKING	Yes
LIFESPAN	50,000 hrs
WARRANTY	5 year limited
POWER SUPPLY	Compatible with all 24VDC power supplies - see page 3

### LEAD TYPES

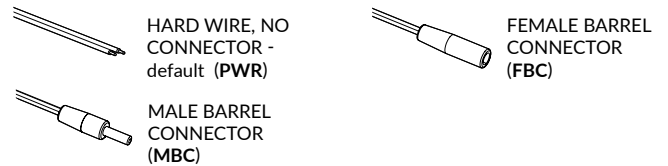

### MOUNTING

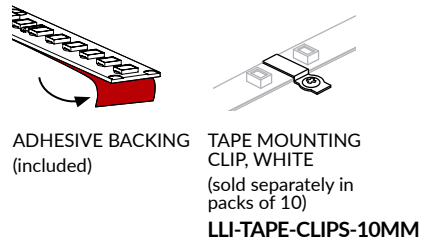

### EXTRUSIONS



## ORDERING GUIDE

← PRODUCT CODE						OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	CRI	LENGTH	POWER FEED	
LLI-LIC5.9W	20		24V	90		LEAD TYPE	LEAD LENGTH
		27K (790 lm/ft)			(enter length in inches, up to 192")		
		30K (813 lm/ft)			R016* 16ft reel		
		35K (831 lm/ft)			R100* 100ft reel		
		40K (860 lm/ft)					
		50K (860 lm/ft)					
						Default [blank] - 48" hard wire end feed (PWR48)	
						PWR	Hard wire (no connector) Enter desired wire length in inches
						MBC	Male barrel connector
						FBC	Female barrel connector
						N/A	No lead attached

Example part number: LLI-LIC5.9W-20-35K-24V-90-96in  
 Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).  
 \*Reels do not include power feed unless specified.

# STATIC WHITE INDIVIDUAL CUT 5.9W LED TAPELIGHT - IP20

## EXTRUSIONS (OPTIONAL)

SURFACE			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Angled (ANG)		0.6" x 0.6"	Uniform
Angled 2 (ANG2)		1.2" x 1.2"	Uniform
Aurora (AUR)		1.3" x 0.8"	Uniform
Closet Rod (CLR)		1.1" x 1.3"	Uniform
Deep (DEP)		0.6" x 0.7"	Uniform
Deep Grazer (DEP-XG)		0.8" x 0.7"	Semi-uniform
Dome (DOM)		0.8" x 0.8"	Uniform
Deep Wide (DPW)		0.6" x 0.9"	Uniform
Flex (FLX)		0.3" x 0.7"	Semi-uniform
Genesis (GEN)		0.9" x 0.8"	Uniform
Grazer (GZR)		0.7" x 0.6"	Semi-uniform
Icon 1 (IC1)		1.0" X 1.0"	Uniform
**Icon 2 (IC2)		1.4" x 2.0"	Uniform
Icon (ICN)		1.4" x 1.4"	Uniform
Icon Side (ICS)		1.7" x 1.4"	Uniform
Square (SQR)		0.5" x 0.6"	Uniform
Thin (THN)		0.3" x 0.7"	Uniform
Wide (WID)		0.4" x 0.9"	Semi-uniform

RECESSED			
EXTRUSION	PROFILE	H x W (IN)	APPEARANCE*
Deep Flanged (DPF)		0.8" x 0.9"	Uniform
Icon 1 Flanged (IC1F)		1.0" X 1.4"	Uniform
**Icon 2 Flanged (IC2F)		1.4" x 2.6"	Uniform
Icon Flanged (ICF)		1.4" x 2.0"	Uniform
In-Floor (IFL)		0.4" x 1.1"	Uniform
Seamless Border (SBD)		2.0" x 1.6"	Uniform
Seamless Cove (SCV)		1.4" x 3.8"	Uniform
Seamless Cove 2 (SCV2)		2.0" x 3.8"	Uniform
Seamless Curve (SMC)		3.8" x 0.7"	Uniform
Seamless Edge (SME)		4.7" x 0.7"	Uniform
Seamless 0.5 (SML)		0.7" x 2.1"	Uniform
Seamless 1.0 (SM1)		0.6" x 2.4"	Uniform
**Seamless 1.5 (SM1.5)		0.8" x 3.4"	Uniform
**Seamless 2.0 (SM2)		0.8" x 3.9"	Uniform
Seamless Square Edge (SQE)		1.7" x 0.7"	Uniform
Square Flanged (SQF)		0.5" x 0.9"	Uniform
Seamless Wall Washer (SWW)		1.5" x 3.7"	Uniform
Thin Flanged (THF)		0.3" x 1.0"	Uniform

\* Appearance of diodes varies depending on the Tapelight & Extrusion combination used. Diode visibility tested at 100% output with frosted lens. Diodes may become more visible as tapelight dims.



\*\* Two rows of tapelight recommended. Tapelights are sidewall-mounted in Seamless 1.5 (SM1.5) and Seamless 2.0 (SM2).


ALL EXTRUSIONS



**DIMMABLE ELECTRONIC 0-10V** 


Optimal performance dims to 0%.\*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

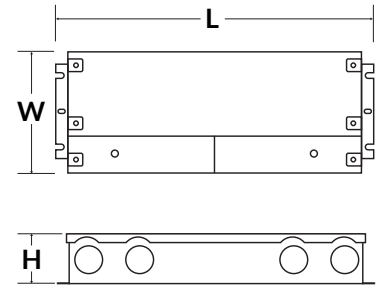

**NON-DIMMABLE ELECTRONIC** 


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

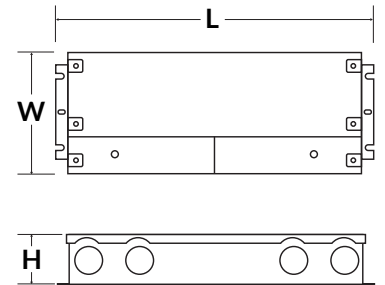


**UNIVERSAL DIMMABLE ELECTRONIC FLICKER-FREE** 

Optimal performance dims to 0-2%.


PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDIMM-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.7"	1.6"
LLI-PS-UDIMM-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.7"	1.6"
LLI-PS-UDIMM-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDIMM-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.8"
LLI-PS-UDIMM-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDIMM-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.8"	4.3"	1.8"
LLI-PS-UDIMM-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

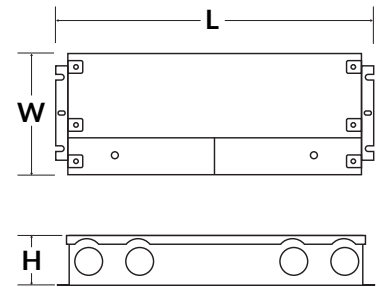

**LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC** 

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

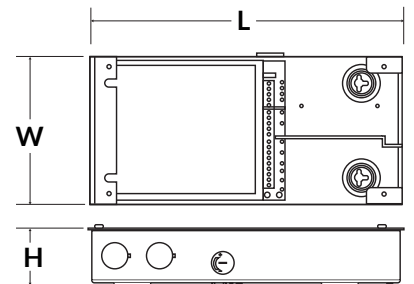

\*Performance can be affected by driver loading and dimmer type.