


STATIC WHITE INDIVIDUAL CUT 5.9W LED TAPELIGHT - IP67

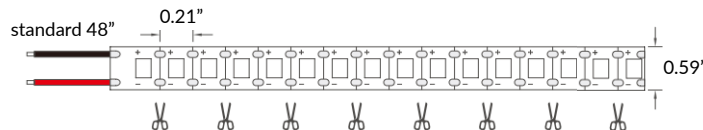


TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

| | |
|------------------|--|
| WATTAGE | 5.9W per foot |
| IP RATING | IP67 - wet locations. Protected against temporary submersion, limited protection against harsh environments. |
| OUTPUT | 2700K - 711 lm/ft 3000K - 732 lm/ft 3500K - 748 lm/ft 4000K - 774 lm/ft 5000K - 774 lm/ft |
| INPUT VOLTAGE | 24VDC |
| OPERATING TEMP. | -4° to 104° F |
| CRI | 90+ |
| CUT LENGTH | Every 0.21", or every 1 LED |
| MAXIMUM RUN | 16 feet |
| DIMENSIONS | 0.59" W x 0.35" H (15mm x 9mm) |
| ADHESIVE BACKING | Yes |
| LIFESPAN | 50,000 hrs |
| WARRANTY | 3 year limited |
| POWER SUPPLY | Compatible with all 24VDC power supplies - see page 3 |


LEAD TYPES

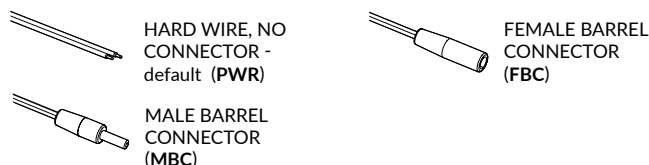

MOUNTING

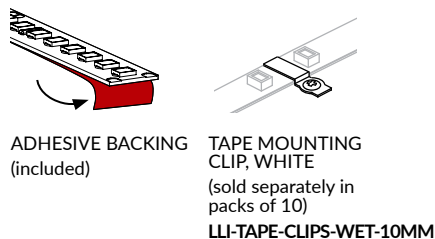

EXTRUSIONS



ORDERING GUIDE

| ← PRODUCT CODE | | | | | | OPTIONAL CODE → | |
|----------------|-----------|-----------------|---------|-----|--|--|-------------|
| SERIES | IP RATING | COLOR | VOLTAGE | CRI | LENGTH | POWER FEED FOR CUSTOM TAPELIGHT LENGTHS* | |
| LLI-LIC5.9W | 67 | | 24V | 90 | | LEAD TYPE | LEAD LENGTH |
| | | 27K (711 lm/ft) | | | (Enter custom length in inches, up to 192".) | | |
| | | 30K (732 lm/ft) | | | R016* (16ft reel) | | |
| | | 35K (788 lm/ft) | | | R050* (50ft reel) | | |
| | | 40K (774 lm/ft) | | | R100* (100ft reel) | | |
| | | 50K (774 lm/ft) | | | | | |
| | | | | | | | |

Example part number: LLI-LIC5.9W-67-35K-24V-90-96in
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).

| POWER FEED FOR CUSTOM TAPELIGHT LENGTHS* | |
|---|-------------------------------------|
| LEAD TYPE | LEAD LENGTH |
| | |
| Default [blank] - 48" hard wire end feed (PWR48)* | |
| PWR Hard wire (no connector) | Enter desired wire length in inches |
| MBC Male barrel connector | |
| FBC Female barrel connector | |



*Power feed included on custom tapelight lengths only. Not included on reels. IP67 endcaps and wire sold separately for reels only, see page 2.

STATIC WHITE INDIVIDUAL CUT 5.9W LED TAPELIGHT - IP67

REEL COMPONENTS (REQUIRED FOR IP67 REELS ONLY. SOLD SEPARATELY)

Wire and sealant kits required for all IP67 reels. Not submersible rated. Refer to installation documents.

Limited warranty: Field cutting, termination, and sealing of IP67 rated tapelight introduces variables outside of manufacturer control, including installation methods, environmental conditions, and workmanship. The manufacturer's warranty is limited to defects in materials and factory workmanship of the base product only and does not cover failures related to water ingress, sealing integrity, or termination.



POWER WIRE

| | | |
|--------------------------|-------------------|----------------------|
| LLI-WIRE-18-2-WET | - | <input type="text"/> |
| R025 | (16ft wire reel) | |
| R050 | (50ft wire reel) | |
| R100 | (100ft wire reel) | |
| R250 | (250ft wire reel) | |
| R500 | (500ft wire reel) | |

WATERPROOF ENDCAPS AND SEALANT KIT

One (1) tube of silicone sealant included per kit

| | | | | |
|----------------------|---|----------------------|---|-------------|
| LLI-WP-KIT-67 | - | <input type="text"/> | - | 10MM |
| EC2 | (2 power feed endcaps, 2 non-power endcaps) | | | |
| EC5 | (5 power feed endcaps, 5 non-power endcaps) | | | |
| EC10 | (10 power feed endcaps, 10 non-power endcaps) | | | |

EXTRUSIONS (OPTIONAL)

| SURFACE | | | |
|-----------------|---------|-------------|-------------|
| EXTRUSION | PROFILE | H x W (IN) | APPEARANCE* |
| Angled 2 (ANG2) | | 1.2" x 1.2" | Uniform |
| Dome (DOM) | | 0.8" x 0.8" | Uniform |
| Deep Wide (DPW) | | 0.6" x 0.9" | Uniform |
| Icon 1 (IC1) | | 1.0" X 1.0" | Uniform |
| **Icon 2 (IC2) | | 1.4" x 2.0" | Uniform |
| Icon (ICN) | | 1.4" x 1.4" | Uniform |
| Icon Side (ICS) | | 1.7" x 1.4" | Uniform |

| RECESSED | | | |
|----------------------------|---------|-------------|-------------|
| EXTRUSION | PROFILE | H x W (IN) | APPEARANCE* |
| Icon 1 Flanged (IC1F) | | 1.0" X 1.4" | Uniform |
| **Icon 2 Flanged (IC2F) | | 1.4" x 2.6" | Uniform |
| Icon Flanged (ICF) | | 1.4" x 2.0" | Uniform |
| Seamless Cove (SCV) | | 1.4" x 3.8" | Uniform |
| Seamless Cove 2 (SCV2) | | 2.0" x 3.8" | Uniform |
| Seamless 1.0 (SM1) | | 0.6" x 2.4" | Uniform |
| Seamless Top Bend (ST1) | | 0.7" x 2.8" | Uniform |
| Seamless Wall Washer (SWW) | | 1.5" x 3.7" | Uniform |

ALL EXTRUSIONS

* Appearance of diodes varies depending on the Tapelight & Extrusion combination used. Diode visibility tested at 100% output with frosted lens. Diodes may become more visible as tapelight dims.




** Two rows of tapelight recommended. Tapelights are sidewall-mounted in Seamless 1.5 (SM1.5) and Seamless 2.0 (SM2).

DIMMABLE ELECTRONIC 0-10V 


Optimal performance dims to 0%.*

| PART NUMBER | CAPACITY | INPUT | OUTPUT | CLASS | LOCATION | L | W | H |
|------------------------------|----------|--------------|--------|---------|----------|-------|------|------|
| LLI-PS-DE010-030W-24V-KO | 30W | 120V or 277V | 24V | CLASS 2 | IP66 WET | 6.5" | 3.6" | 1.6" |
| LLI-PS-DE010-060W-24V-KO | 60W | 120V or 277V | 24V | CLASS 2 | IP66 WET | 7.4" | 3.6" | 1.6" |
| LLI-PS-DE010-096W-24V-KO | 96W | 120V or 277V | 24V | CLASS 2 | IP66 WET | 8.7" | 3.7" | 1.7" |
| LLI-PS-DE010-192W-24V-CL2-KO | 2x96W | 120V or 277V | 24V | CLASS 2 | IP66 WET | 10.9" | 4.3" | 1.9" |
| LLI-PS-DE010-200W-24V-KO | 200W | 120V or 277V | 24V | CLASS 1 | IP66 WET | 10.2" | 4.1" | 1.8" |
| LLI-PS-DE010-288W-24V-CL2-KO | 3x96W | 120V or 277V | 24V | CLASS 2 | IP66 WET | 11.9" | 4.3" | 1.9" |
| LLI-PS-DE010-300W-24V-KO | 300W | 120V or 277V | 24V | CLASS 1 | IP66 WET | 10.9" | 4.3" | 1.8" |

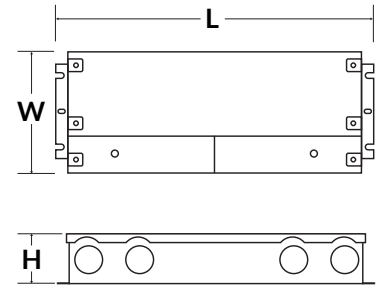

NON-DIMMABLE ELECTRONIC 


| PART NUMBER | CAPACITY | INPUT | OUTPUT | CLASS | LOCATION | L | W | H |
|----------------------------|----------|----------|--------|---------|----------|-------|------|-------|
| LLI-PS-NDE-030W-24V-KO | 30W | 100-277V | 24V | CLASS 2 | IP66 WET | 6.5" | 3.5" | 1.02" |
| LLI-PS-NDE-060W-24V-KO | 60W | 100-277V | 24V | CLASS 2 | IP66 WET | 7.4" | 3.5" | 1.2" |
| LLI-PS-NDE-096W-24V-KO | 96W | 100-277V | 24V | CLASS 2 | IP66 WET | 8.7" | 3.7" | 1.7" |
| LLI-PS-NDE-192W-24V-CL2-KO | 2x96W | 100-277V | 24V | CLASS 2 | IP66 WET | 10.9" | 4.1" | 1.9" |
| LLI-PS-NDE-200W-24V-KO | 200W | 100-277V | 24V | CLASS 1 | IP66 WET | 10.3" | 4.1" | 1.8" |
| LLI-PS-NDE-288W-24V-CL2-KO | 3x96W | 100-277V | 24V | CLASS 2 | IP66 WET | 11.9" | 4.1" | 1.9" |
| LLI-PS-NDE-300W-24V-KO | 300W | 100-277V | 24V | CLASS 1 | IP66 WET | 10.9" | 4.3" | 1.8" |

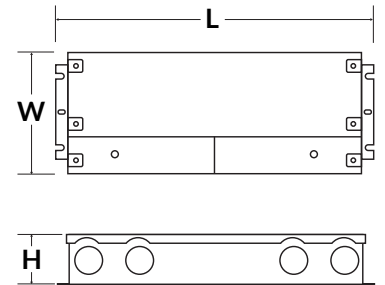


UNIVERSAL DIMMABLE ELECTRONIC FLICKER-FREE 

Optimal performance dims to 0-2%.


| PART NUMBER | CAPACITY | INPUT | OUTPUT | CLASS | LOCATION | L | W | H |
|------------------------------|----------|----------|--------|---------|----------|-------|------|------|
| LLI-PS-UDIMM-030W-24V-KO | 30W | 110-277V | 24V | CLASS 2 | IP66 WET | 6.5" | 3.7" | 1.6" |
| LLI-PS-UDIMM-060W-24V-KO | 60W | 110-277V | 24V | CLASS 2 | IP66 WET | 7.4" | 3.7" | 1.6" |
| LLI-PS-UDIMM-096W-24V-KO | 96W | 110-277V | 24V | CLASS 2 | IP66 WET | 8.7" | 3.7" | 1.6" |
| LLI-PS-UDIMM-192W-24V-CL2-KO | 2x96W | 110-277V | 24V | CLASS 2 | IP66 WET | 10.9" | 4.3" | 1.8" |
| LLI-PS-UDIMM-200W-24V-KO | 200W | 110-277V | 24V | CLASS 1 | IP66 WET | 10.2" | 4.1" | 1.8" |
| LLI-PS-UDIMM-288W-24V-CL2-KO | 3x96W | 110-277V | 24V | CLASS 2 | IP66 WET | 11.8" | 4.3" | 1.8" |
| LLI-PS-UDIMM-300W-24V-KO | 300W | 110-277V | 24V | CLASS 1 | IP66 WET | 10.9" | 4.3" | 1.8" |

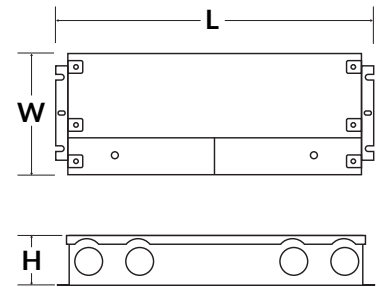

LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC 

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.

| PART NUMBER | CAPACITY | INPUT | OUTPUT | CLASS | LOCATION | L | W | H |
|---------------|----------|----------|--------|---------|----------|-------|------|------|
| L3D0-96W24V-U | 96W | 120-277V | 24V | CLASS 2 | IP20 DRY | 10.5" | 5.5" | 2.0" |

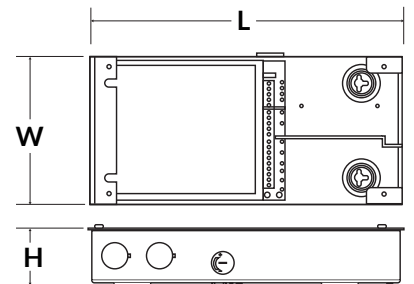

*Performance can be affected by driver loading and dimmer type.