


# WARM FADE 3.5W LED TAPELIGHT - IP67




## TECHNICAL INFORMATION


NOTE: All data has +/- 5% tolerance.

WATTAGE	3.5W per foot
IP RATING	IP67 - wet locations. Protected against temporary submersion, limited protection against harsh environments.
OUTPUT	1800K - 2700K (266 lm/ft) 1800K - 3000K (274 lm/ft)
INPUT VOLTAGE	24VDC
OPERATING TEMPERATURE	-13° to 140° F
CRI	90+
CUT LENGTH	Every 2.5", or every 16 LEDs
MAXIMUM RUN	16 feet
DIMENSIONS	0.67" W x 0.35" H (17mm x 9.0mm)
ADHESIVE BACKING	Yes - VHB
LIFESPAN	50,000 hrs
WARRANTY	5 year limited
POWER SUPPLY	Compatible with 0-10V dimmable and LLI-PS-UDEFF dimmable LED power supplies - see page 3

### LEAD TYPES

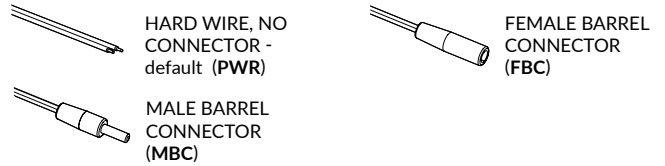

### MOUNTING

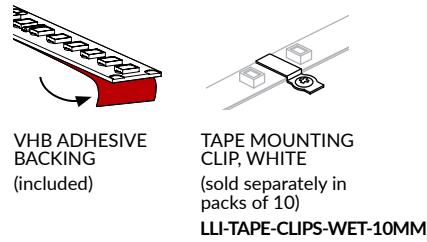

### EXTRUSIONS



## ORDERING GUIDE

← PRODUCT CODE						OPTIONAL CODE →	
SERIES	IP RATING	COLOR	VOLTAGE	CRI	LENGTH	POWER FEED	
LLI-LWF3.5W	67	[ ]	24V	90	[ ]	LEAD TYPE	LEAD LENGTH
		27D 30D			(enter length in inches, up to 192")	[ ]	[ ]
						Default [blank] - 48" hard wire end feed (PWR48)	
						<b>PWR</b> Hard wire (no connector)      Enter desired wire length in inches <b>MBC</b> Male barrel connector <b>FBC</b> Female barrel connector	

Example part number: LLI-LWF3.5W-67-27D-24V-90-96in  
Default 48in power wire (PWR48) included on all custom lengths. Use OPTIONAL section to specify other power feed(s).

# WARM FADE 3.5W LED TAPELIGHT - IP67

## OVERALL LENGTH / CUT POINT GUIDE

Measurements listed below include extra 1" length required for IP67 endcaps and power feed.

3.5"	5.9"	8.4"	10.8"	13.3"	15.8"	18.2"	20.7"	23.1"	25.6"	28.1"	30.5"
33.0"	35.4"	37.9"	40.4"	42.8"	45.3"	47.8"	50.2"	52.7"	55.1"	57.6"	60.1"
62.5"	65.0"	67.4"	69.9"	72.4"	74.8"	77.3"	79.7"	82.2"	84.7"	87.1"	89.6"
92.0"	94.5"	97.0"	99.4"	101.9"	104.3"	106.8"	109.3"	111.7"	114.2"	116.6"	119.1"
121.6"	124.0"	126.5"	129.0"	131.4"	133.9"	136.3"	138.8"	141.3"	143.7"	146.2"	148.6"
151.1"	153.6"	156.0"	158.5"	160.9"	163.4"	165.9"	168.3"	170.8"	173.2"	175.7"	178.2"
180.6"	183.1"	185.5"	188.0"	190.5"	192.9"						

# WARM FADE 3.5W LED TAPELIGHT - IP67


## POWER SUPPLIES (SOLD SEPARATELY)

### DIMMABLE ELECTRONIC 0-10V



Optimal performance dims to 0%.\*

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

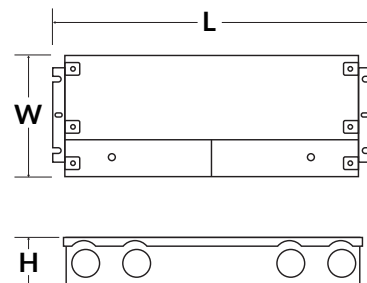


### DIMMABLE ELECTRONIC FLICKER-FREE



Optimal performance dims to 2-5%.

PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"

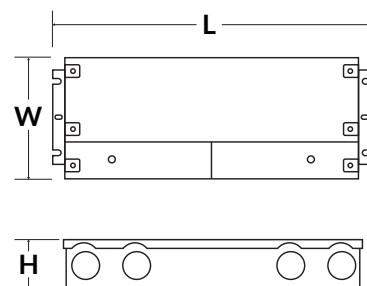

\*Performance can be affected by driver loading and dimmer type.