




COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V

Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

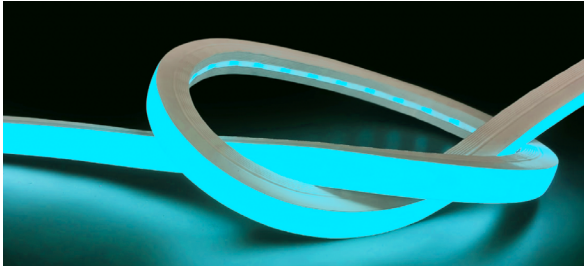


TECHNICAL INFORMATION

NOTE: All data has +/- 5% tolerance.

WATTAGE	6.0W per foot
IP RATING	IP20 - dry locations
IK RATING	IK10
BEAM ANGLE	118°
HOUSING MATERIAL	Silicone, UV resistant per ISO 4892-3
OUTPUT	Red - 39 lm/ft Green - 66 lm/ft Blue - 9 lm/ft 2700K - 62 lm/ft 3000K - 62 lm/ft 3500K - 62 lm/ft RGB+27K - 160 lm/ft RGB+30K - 167 lm/ft RGB+35K - 173 lm/ft
INPUT VOLTAGE	24VDC
SEGMENT LENGTH	Every 1.64", field-cuttable
MAXIMUM RUN	32 feet
DIMENSIONS	0.79" W x 0.79" H
MINIMUM BEND	11.8" diameter - top bending 31.5" diameter - side bending
INSTALLATION TEMP.	32°F to 140°F (do not install when temperatures are below freezing)
OPERATING TEMP.	-40°F to 140°F
WARRANTY	3 year limited
POWER SUPPLY	Compatible with all non-dim 24VDC power supplies
CONTROLS	Color and intensity can be adjusted with DMX decoder or RF receiver and controller


FEED TYPES

Product has 48in hard wire end feed unless otherwise specified. Other options subject to availability - contact us. Power Feed Caps and End Caps illuminate continuously to the end.

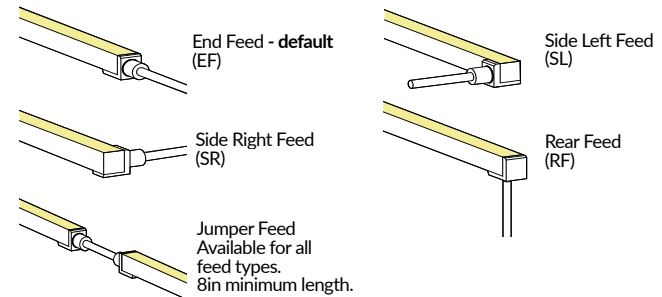

MOUNTING

See page 4 for details. 2 clips recommended per 12in of LED Neon. Sold separately.

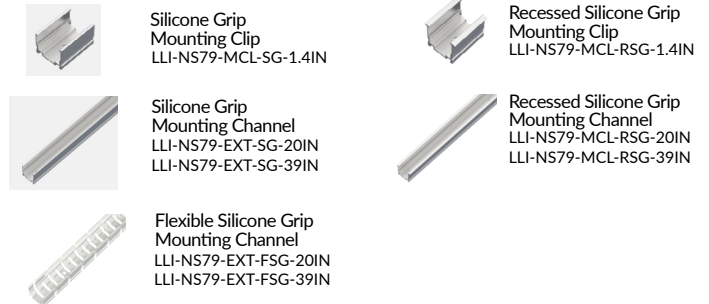

ORDERING GUIDE

← PRODUCT CODE

SERIES	IP RATING	TYPE	COLOR	VOLTAGE	LENGTH
LLI-N6.0W	20	SD79		24V	
			R27 R30 R35		

Enter total length in inches.
Nominal length only.
Actual lengths vary by cut point. Refer to page 2.

OPTIONAL CODE →

POWER FEED		
LEAD TYPE	LEAD LENGTH	FEED TYPE

Default [blank] - 48" hard wire end feed (PWR48EF)

PWR Hard Wire (no connector) Enter desired wire length in inches

EF End Feed
RF Rear Feed
SL Side Left
SR Side Right


For runs that require power feeds on both ends, repeat optional power feed code.

Example part number: LLI-N6.0W-20-SD79-R30-24V-96in
Default 48in end feed power wire (PWR48EF) included. Use OPTIONAL section to specify other power feed(s).

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V

Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

BEND ORIENTATION

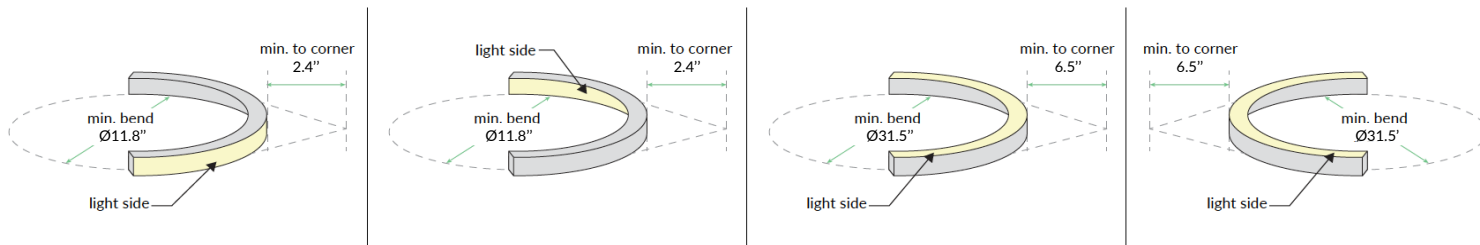

OVERALL LENGTH / SEGMENT GUIDE

Dimension tolerance of $\pm 1/8"$.

Measurements below do not include area required for routing power wire. Add 1" distance to layout to account for routing end feed power wire.


This product expands and contracts in varying ambient temperatures. If butting Neon end-to-end, add 1/2" to 1" gap between sections for expansion.

10.2"	11.6"	13.0"	14.5"	15.9"	17.3"	18.7"	20.1"	21.5"	22.9"	24.3"	25.7"
27.1"	28.5"	29.9"	31.3"	32.7"	34.1"	35.5"	36.9"	38.4"	39.8"	41.2"	42.6"
44.0"	45.4"	46.8"	48.2"	49.6"	51.0"	52.4"	53.8"	55.2"	56.6"	58.0"	59.4"
60.8"	62.3"	63.7"	65.1"	66.5"	67.9"	69.3"	70.7"	72.1"	73.5"	74.9"	76.3"
77.7"	79.1"	80.5"	81.9"	83.3"	84.7"	86.2"	87.6"	89.0"	90.4"	91.8"	93.2"
94.6"	96.0"	97.4"	98.8"	100.2"	101.6"	103.0"	104.4"	105.8"	107.2"	108.6"	110.1"
111.5"	112.9"	114.3"	115.7"	117.1"	118.5"	119.9"	121.3"	122.7"	124.1"	125.5"	126.9"
128.3"	129.7"	131.1"	132.5"	134.0"	135.4"	136.8"	138.2"	139.6"	141.0"	142.4"	143.8"
145.2"	146.6"	148.0"	149.4"	150.8"	152.2"	153.6"	155.0"	156.4"	157.9"	159.3"	160.7"
162.1"	163.5"	164.9"	166.3"	167.7"	169.1"	170.5"	171.9"	173.3"	174.7"	176.1"	177.5"
178.9"	180.3"	181.8"	183.2"	184.6"	186.0"	187.4"	188.8"	190.2"	191.6"	193.0"	194.4"
195.8"	197.2"	198.6"	200.0"	201.4"	202.8"	204.3"	205.7"	207.1"	208.5"	209.9"	211.3"
212.7"	214.1"	215.5"	216.9"	218.3"	219.7"	221.1"	222.5"	223.9"	225.3"	226.7"	228.2"
229.6"	231.0"	232.4"	233.8"	235.2"	236.6"	238.0"	239.4"	240.8"	242.2"	243.6"	245.0"
246.4"	247.8"	249.2"	250.6"	252.1"	253.5"	254.9"	256.3"	257.7"	259.1"	260.5"	261.9"
263.3"	264.7"	266.1"	267.5"	268.9"	270.3"	271.7"	273.1"	274.5"	276.0"	277.4"	278.8"
280.2"	281.6"	283.0"	284.4"	285.8"	287.2"	288.6"	290.0"	291.4"	292.8"	294.2"	295.6"
297.0"	298.4"	299.9"	301.3"	302.7"	304.1"	305.5"	306.9"	308.3"	309.7"	311.1"	312.5"
313.9"	315.3"	316.7"	318.1"	319.5"	320.9"	322.3"	323.8"	325.2"	326.6"	328.0"	329.4"
330.8"	332.2"	333.6"	335.0"	336.4"	337.8"	339.2"	340.6"	342.0"	343.4"	344.8"	346.2"
347.7"	349.1"	350.5"	351.9"	353.3"	354.7"	356.1"	357.5"	358.9"	360.3"	361.7"	363.1"
364.5"	365.9"	367.3"	368.7"	370.1"	371.6"	373.0"	374.4"	375.8"	377.2"	378.6"	380.0"
381.4"	382.8"	384.2"	385.6"	387.0"	388.4"	389.8"	391.2"	392.6"	394.0"		

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V

Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

ANTI-WICKING FERRULE



Standard on all LED Neon power feeds. Located 4-6" from the connector. Protects against water ingress and circuit board corrosion.

ENDCAP & SEALANT (REQUIRED, SOLD SEPARATELY)



Closing Endcap
1.0" L x 0.9" W x 0.9" H



Silicone glue
45g/pc

ENDCAP & SEALANT KIT

Glue-on endcap and silicone tube for sealing LED Neon

LLI-NS79-FC-EC-KIT

NOTE: Endcap dimensions are slightly larger than the LED Neon profile dimensions and may protrude outside of mounting channel/clips.


COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V

Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

MOUNTING CHANNELS AND CLIPS (SOLD SEPARATELY)

NOTE: Leave a 0.5" to 1" gap between Neon power feed and mounting channel, to avoid undue stress on power feed cables.

SILICONE GRIP ALUMINUM MOUNTING CHANNEL - SILVER ANODIZED



Silicone Grip Mounting Clip

Recommended 2 clips every 12"

Part Number: LLI-NS79-MCL-SG-1.4IN

Dimensions: 0.98"W x 0.95"H x 1.38"L




20"/39" Silicone Grip Mounting Channel

Part Number: LLI-NS79-EXT-SG-20/39IN

Dimensions: 0.98"W x 0.95"H x 20"/39"L

RECESSED SILICONE GRIP ALUMINUM MOUNTING CHANNEL - SILVER ANODIZED



Recessed Silicone Grip Mounting Clip

Recommended 2 clips every 12"

Part Number: LLI-NS79-MCL-RSG-1.4IN

Dimensions: 1.18"W x 0.95"H x 1.38"L



20"/39" Recessed Silicone Grip Mounting Channel

Part Number: LLI-NS79-EXT-RSG-20/39IN

Dimensions: 1.18"W x 0.95"H x 20"/39"L

FLEXIBLE ALUMINUM MOUNTING CHANNEL - SILVER ANODIZED




20"/39" Flexible Mounting Channel

Part Number: LLI-NS79-EXT-FSG-20/39IN

Dimensions: 0.98"W x 0.95"H x 20"/39"L

ADJUSTABLE MOUNTING BRACKET

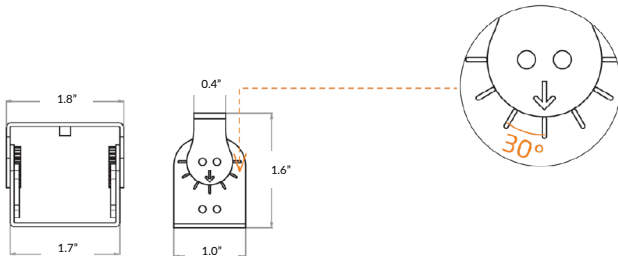

Recommended 3 brackets for every 39" channel
Adjusts in 15° increments, notches every 30°

Part Number: LLI-N-BKT-ADJ

Dimensions: 1" L x 1.6" H x 1.8" W

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V


Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

POWER SUPPLY (SOLD SEPARATELY)

NON-DIMMABLE ELECTRONIC




PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

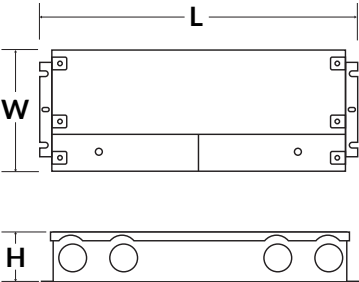

RF RECEIVER (SOLD SEPARATELY)

LLI-C-RCV-UR-RF-4CH

CONTROLLER COMPATIBILITY	Compatible with all RF LLI-C-CTRL controllers.
LED COMPATIBILITY	Static Color, Tunable White & RGB(W) LEDs
CHANNELS	4 Channel, 8 Amp
INPUT VOLTAGE	12V / 24V (power supply not included)
CAPACTIY	12V - 96W, 24V - 192W
FEATURES	Can be controlled by up to (8) controllers Can be synchronized with unlimited receivers up to 320ft away



COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V


Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

RF CONTROLLERS (SOLD SEPARATELY)

REMOTE CONTROLLER

LLI-C-CTRL-RGBW-HH


RECEIVER COMPATIBILITY	Compatible with Universal RF receivers
LED COMPATIBILITY	RGB(W) LEDs
INPUT VOLTAGE	Battery operated (3 AAA batteries not included)
FEATURES	Programmable up to 4 zones, 3 scenes Color adjustment Light intensity adjustment

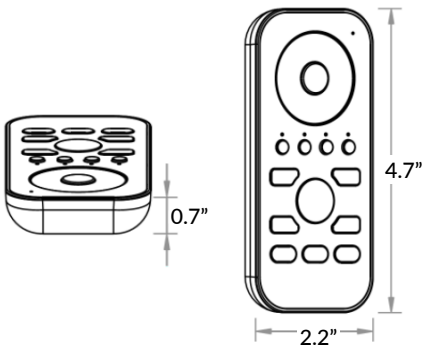

TOUCH PANEL WALL CONTROLLER

LLI-C-CTRL-RGBW-TP-WH

RECEIVER COMPATIBILITY	Compatible with Universal RF receivers
LED COMPATIBILITY	RGB(W) LEDs
INPUT VOLTAGE	12V DC power supply required (not included)
FEATURES	Control range ≥ 65ft Programmable up to 3 scenes 4 color presets Color adjustment Light intensity adjustment

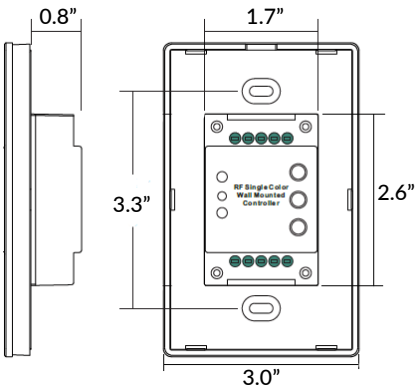

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V



Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

DMX DECODERS (SOLD SEPARATELY)

DMX512 DECODER

LLI-C-DEC-DMX512-8A

LOCATION RATING	Indoor only
FUNCTION	Static color, variable white, RGB(W) LEDs
CHANNELS	4 channel output, 8 Amp maximum 512 addressable DMX channels
CAPACITY	12V - 96W maximum 24V - 192W maximum
COMPATIBILITY	Compatible with LLI-C-CTRL-DMX controllers

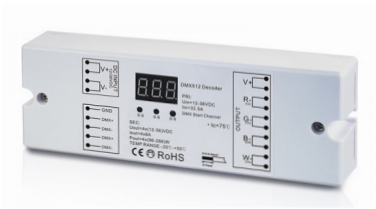



POWER

Power supply not included. 12V/24V non-dimming power supply required.

RDM DMX512 DECODER

LLI-C-DEC-DMX512-8A-RDM

OUTPUT	8A maximum, 4 channels
LOCATION RATING	Indoor only
FUNCTION	RDM communication and PWM dimming for static white, static color, tunable white, and RGB(W) LEDs
CHANNELS	4 channel output, 8 Amp maximum 512 addressable DMX channels
CAPACITY	12V - 96W maximum 24V - 192W maximum
COMPATIBILITY	Compatible with LLI-C-CTRL-DMX controllers



FEATURES

Can be controlled by up to eight (8) controllers. Can be synchronized with twenty (20) decoders.

POWER

Power supply not included. 12V/24V non-dimming power supply required.

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V


Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

DMX WALL CONTROLLERS (SOLD SEPARATELY)

STAND ALONE DMX WALL CONTROLLER, GU2

LLI-C-CTRL-DMX-STICK-GU2

INCLUDED IN PACKAGE	Controller, CD-ROM, USB cable, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher, USB 2.0 port
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (included)
CONNECTIONS	Power (2 pins), DMX (3 pins), Port (2 pins), Micro-USB Port
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only





FEATURES

- Up to 24 dynamic or static scenes
- Wall mounted control panel with glass face, touch-sensitive buttons
- Programmable with included USB cable and software – no Ethernet or WiFi required

STAND ALONE DMX WALL CONTROLLER, DE3

LLI-C-CTRL-DMX-STICK-DE3

INCLUDED IN PACKAGE	Controller, connector block, power supply
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher / iOS phone or tablet / Android phone or tablet
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (Mac/Windows) DMX Lightpad 3 App (iOS/Android) Easy Remote App (iOS/Android)
CONNECTIONS	Power/DMX - screw terminal and RJ45 compatible Memory - MicroSD slot Programming - MicroUSB port
POWER SUPPLY	6VDC power supply (included)
MEMORY	MicroSD card (not included)
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only



FEATURES

- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- Integrated clock and calendar for scheduling events
- Touch-sensitive buttons
- USB and Ethernet connectivity for programming
- Windows/Mac software for programming dynamic effects
- iPhone/iPad/Android apps for remote control and program

COLOR CHANGING RGBW LED NEON (FIELD CUTTABLE) - 24V

Square XL Profile / Dual Bending / Silicone (SD79) / High Output / IP20

DMX WALL CONTROLLERS (SOLD SEPARATELY)

STAND ALONE DMX WALL CONTROLLER, CW4

LLI-C-CTRL-DMX-STICK-CW4

-

FINISH

BL Black glass

WH White glass

INCLUDED IN PACKAGE	Controller, connector block, power supply, mini-USB cable, ESA2 software, ESA Pro2 Software
OS/COMPUTER REQUIREMENTS	Mac OSx 10.6 or higher / Windows XP or higher
PROGRAM SOFTWARE	Easy Stand Alone, ESA2 (Mac/Windows)
CONNECTIONS	Power/DMX - screw terminal and RJ45 Programming - miniUSB port
POWER SUPPLY	Requires 5-10VDC 0.6A power supply (included)
MEMORY	Integrated flash memory
MOUNTING	Single or double gang wall box
IP RATING	IP20 - dry locations only



FEATURES

- Can be controlled directly from a computer, smartphone, or tablet
- Touch-sensitive buttons, glass face
- Up to 36 dynamic or static scenes
- 8 port triggers
- 1024 DMX channels control up to 340 RGB fixtures
- Windows/Mac software for programming dynamic effects
- Internal clock and calendar with sunrise/sunset triggering

