


# OUTDOOR COLOR CHANGING WALL WASHER/GRAZER

## SPECIFICATIONS

WATTAGE, CCT, & OUTPUT	20", 25W RGBW - 1125 lumens	39", 50W RGBW - 2250 lumens
BEAM ANGLE	15°, 25°, 30°, 40°, 60°, 10x30°, 10x45°, 10x65°, 10x70°, 20x65°	
IP RATING	IP66 wet locations - wet locations. Not suitable for submersion, limited protection against harsh environments.	
INPUT VOLTAGE	24VDC	
CRI	80+	
OPERATING TEMP.	-4° to 104° F	
FINISH	Black powder coat	
LENS MATERIAL	Tempered glass	
WEIGHT	25W - 3.3 lb 50W - 6 lb	
DIMENSIONS	3.1" H x 1.8" W x 39" or 20" L	
MOUNTING	Adjustable locking bracket	
MAXIMUM RUN	Max run (3) 50W units, (6) 25W units or max 8A of combined lengths	
POWER CABLE & CONNECTORS	Each unit comes with 16" power cable on each end with IP65 rated connector -- see page 2 for power and jumper connector options	
POWER SUPPLY	Compatible with all non-dimmable 24VDC power supplies -- see page 3	

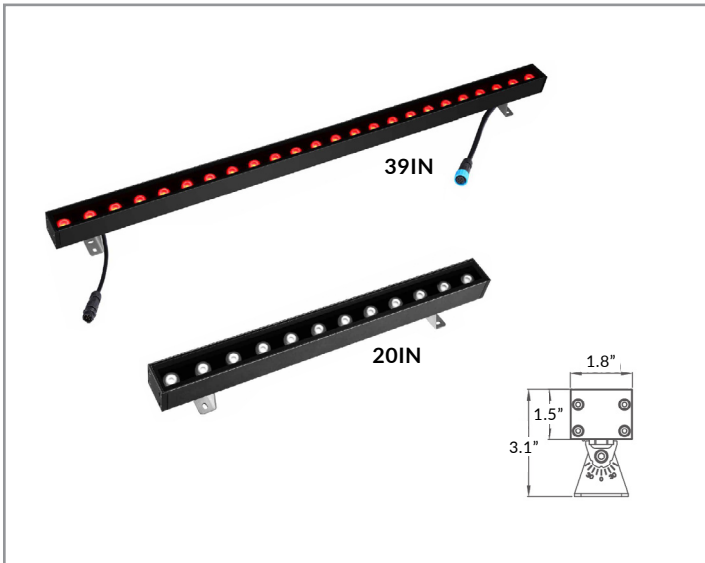

## FEATURES & RECOMMENDED APPLICATIONS

Our outdoor wall washer/grazer product can be used for interior and exterior applications and is designed to highlight architectural features including surface textures, coves, and facade details. Our Color Changing RGBW version is perfect for adding color while also providing a separate white LED to provide a clean white graze or wash. Different fixture lengths and beam angles allow for multiple surface illumination applications.


## ORDERING GUIDE

Example part number: LLI-OWG-39IN50W-R30-30-66-24V

SERIES	LENGTH/ WATTAGE	CCT/ COLOR	BEAM ANGLE	IP RATING	INPUT
LLI-OWG	39IN50W 20IN25W	R30 - RGBW+ 3000K R40 - RGBW+ 4000K R60 - RGBW+ 6000K	15 - 15° 25 - 25° 30 - 30° 40 - 40° 60 - 60° 1030 - 10x30° 1045 - 10x45° 1065 - 10x65° 1070 - 10x70° 2065 - 20x65°	66 - IP66	24V - 24VDC

# OUTDOOR COLOR CHANGING WALL WASHER/GRAZER


## POWER FEED & CONNECTOR OPTIONS (IP65)

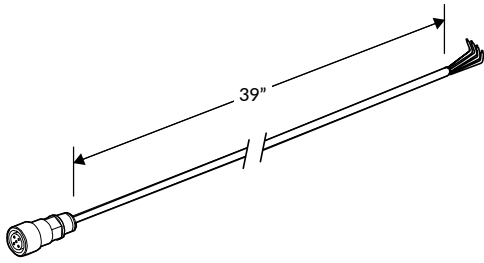

### POWER CONNECTOR, 39IN

Power cable to connect OWG fixture to DMX decoder (required for the start of each run)


LLI-OWG-65-PWR5-39IN

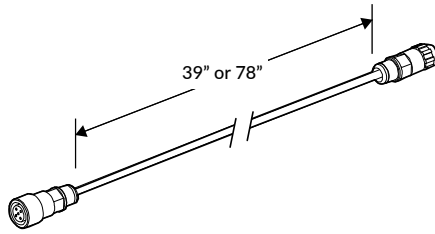

### MALE TO FEMALE JUMPER CONNECTOR

Power connector for extending fixture-to-fixture distance (optional)

LLI-OWG-65-CON5 -  39IN  
 78IN




### ENDCAP

Endcap for sealing power cable at the end of each run (required)

LLI-OWG-65-EC

## LAYOUT DIAGRAM

Max run (3) 50W units, (6) 25W units or max 8A of combined lengths.

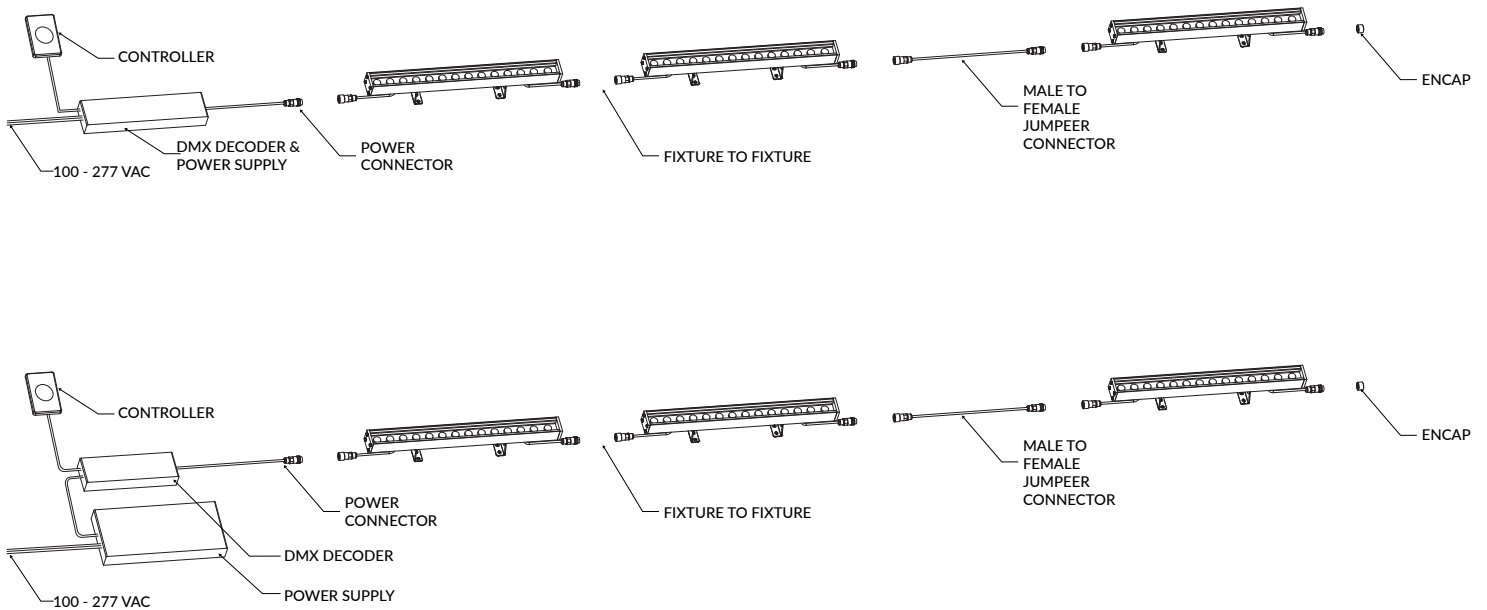

# OUTDOOR COLOR CHANGING WALL WASHER/GRAZER

DMX DIMMABLE POWER SUPPLY AND DECODER (SOLD SEPARATELY)

---

SERIES	PROTOCOL	CAPACITY	OUTPUT
LLI-PS-DEC	DMX512		24V
		075W	
		096W	
		200W	

INPUT VOLTAGE	100 - 277 VAC 50/60Hz
OUTPUT VOLTAGE	24V constant voltage
OUTPUT CAPACITY	75W, 96W, 200W
DIMMING	PWM digital dimming, 0.1-100% Logarithmic or linear dimming curve selectable
IP RATING	IP20 - dry locations
PROTECTION	Over-current and over-temperature protection: auto recover after fault condition is resolved
OPERATING TEMP	-4° to 113° F
PROTOCOL	DMX512
WARRANTY	5 year limited



## DMX ADDRESSABILITY

512 addressable DMX channels with digital display

CONTROLS (SOLD SEPARATELY)

---