



SPECIFIER _____

PROJECT _____

DATE _____

TUNABLE WHITE DIMMING MODULE



QUICK SPECIFICATIONS

| | |
|-----------------------------|---|
| LED TAPELIGHT COMPATIBILITY | Compatible with 24V DC tunable white LED tapelights |
| IP RATING | IP65 - wet locations. Not suitable for submersion. |
| CAPACITY | 5A, 96W |
| OUTPUT CHANNELS | 2 |
| DIMMING | (2) Low Voltage dimmers required: one dimmer controls lumen intensity, the other dimmer controls color. |
| FREQUENCY | 1KHz, Flicker-free 0-100% Dimming |
| OPERATING TEMP. | 20°C - 60°C |
| PROTECTION | Hiccup-mode: auto-recovery after removing short circuit condition. Temperature protection: auto-recovery when temperature <105°C |




PART NUMBER

| SERIES | LED | VOLTAGE | CAPACITY |
|----------------|-----|---------|----------|
| LLI-PS-DIM-MOD | TW | 24V | 96W |


POWER

Power supply not included.
Requires external non-dim power supply, 96W max.



TUNABLE WHITE DIMMING MODULE

EXAMPLE WIRING DIAGRAM - DUAL DIMMER CONTROLLER

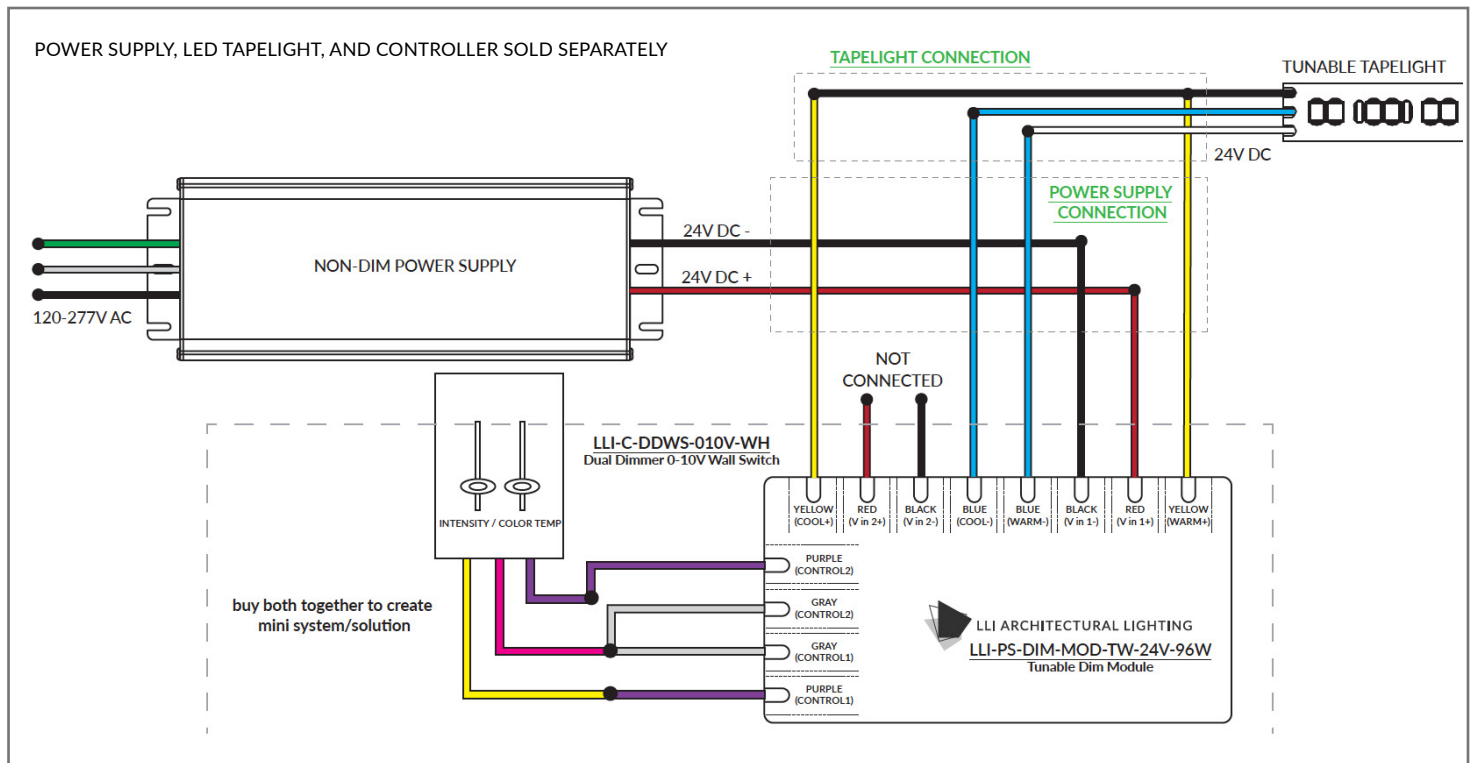

EXAMPLE WIRING DIAGRAM - SEPARATE DIMMERS

