


SEAMLESS WALL WASHER EXTRUSION + LED TAPELIGHT



5 YEAR
LIMITED
WARRANTY

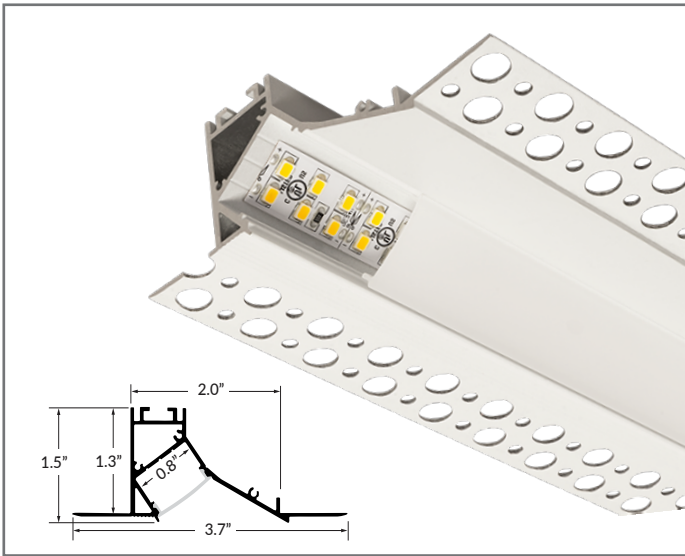

SPECIFICATIONS

FINISH	White Powder Coat
LENS	Frosted
WATTAGE	0.75W/ft to 8.8W/ft
IP RATING	IP20, IP65, IP68 - rating applies to tapelight, see page 2 for details
CCT / COLOR	2200K - 5200K; RGB; RGBW; tunable white; warm fade
BEAM SPREAD	115° typical with Frosted lens
INPUT VOLTAGE	24VDC
LENGTH	Made to order. Actual lengths vary by LED tapelight cut points. Maximum assembled length is 78in. Lengths over 78in are made with multiple sections, shipped unassembled.
OUTPUT	39 to 403 lm/ft
LEDS	Single binned LEDs +/- 30-70 CCT, MacAdam 3 SDCM
MATERIAL	Extrusion - Anodized aluminum; Lens - Polycarbonate
MOUNTING	Mounting screws and plaster (not included)
POWER SUPPLY	Requires a 24V power supply - see page 5
WARRANTY	IP20 - 5 year limited, IP65/67/68 - 3 year limited

FEATURES & RECOMMENDED APPLICATIONS

Mud-in ceiling extrusion for wall washing applications. The tilted design aims a swath of light that is ideal for illuminating artwork, signs, or other wall-mounted points of interest.



PRODUCT: LLI-SWW-WF-H4.4W-35K-24V-96IN

SEAMLESS WALL WASHER EXTRUSION + LED TAPELIGHT

ORDERING GUIDE

← PRODUCT CODE

PROFILE LLI-SWW	1a. FINISH W White	1b. LENS F Frosted	2. LED H4.4W WATTS/FT 0.75-8.8 W/ft	3. IP RATING* 65 [blank] - IP20 65 - IP65 68 - IP68	4. CCT / COLOR 30K 22K-52K Warm Fade Tunable White Static Color RGB RGBW	INPUT 24V	5. LENGTH 48IN Enter overall length in inches. Length can be a complete section (if under max run) or separated into smaller sections. Nominal length only. Actual lengths vary by LED cut point.
---------------------------	--	--	---	---	--	---------------------	---

OPTIONAL →

POWER FEED		
6. LEAD TYPE	7. LEAD LENGTH	8. FEED TYPE
[blank]		

Default [blank] - 48" hard wire rear feed (PWR48RF)

Refer to section 7 on the next page for an alternate power feed configuration.

Example part number: **LLI-SWW-WF-H4.4W-65-35K-24V-48IN**

More LED tapelight and color options available upon request. Visit www.llialighting.com or contact us for details.

1. FINISH & LENS

1a. FINISH W W White Powder Coat	1b. LENS F F Frosted lens
--	---

2-4. LED TAPELIGHT OPTIONS

2. LED CODE	3. IP RATING*	4. CCT / COLOR	TECHNICAL DATA				
H4.4W	[blank]	30K	WATTAGE	DELIVERED LM/FT @ 30K*	FROSTED LENS APPEARANCE**	CRI	CUT POINTS*
For IP20, leave [blank].							
T0.75W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	0.75 W/ft	39 lm/ft	UNIFORM	90+	26 ft 1"
1.5W (White)	20 / 65* / 68*	22K / 27K / 30K / 35K / 42K / 52K	1.5 W/ft	72 lm/ft	IMAGING	90+	60 ft* 3.9"
T1.5W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	1.5 W/ft	78 lm/ft	UNIFORM	90+	26 ft 1"
2.5W (White)	20 / 65 / 68	22K / 24K / 27K / 30K / 35K / 42K / 52K	2.5 W/ft	95 lm/ft	SEMI-UNIFORM	90+	32 ft 2"
★ 2.2W (White)	20 / 65* / 68*	22K / 27K / 30K / 35K / 42K / 52K	2.2 W/ft	96 lm/ft	IMAGING	90+	60 ft* 3.9"
T2.5W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	2.5 W/ft	103 lm/ft	UNIFORM	90+	20 ft 1"
3.5W (White)	20 / 65 / 68	22K / 27K / 30K / 35K / 42K / 52K	3.5 W/ft	122 lm/ft	SEMI-UNIFORM	90+	40 ft 2.5"
♦ WF3.5W (Warm Fade)	20 / 65 / 68	27D (18-27K) / 30D (18-30K)	3.5 W/ft	137 lm/ft	SEMI-UNIFORM	90+	16 ft 2.5"
TW2.7W (Tunable White)	20 / 65 / 68	1835 (18-35K) / 2235 (22-35K) / 2752 (27-52K)	2.7 W/ft	141 lm/ft	SEMI-UNIFORM	90+	26 ft 3.3"
★ 4.4W (White)	20 / 65 / 68	22K / 24K / 27K / 30K / 35K / 42K / 52K	4.4 W/ft	148 lm/ft	UNIFORM	90+	32 ft 2"
H3.5W (White)	20 / 65 / 68	22K / 27K / 30K / 35K / 42K / 52K	3.5 W/ft	184 lm/ft	UNIFORM	90+	26 ft 2.5"
T5.0W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	5.0 W/ft	199 lm/ft	UNIFORM	90+	13 ft 1"
H4.0W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	4.0 W/ft	204 lm/ft	UNIFORM	90+	40 ft 1.3"
R5.4W (White, High R9)	20 / 65 / 68	22K / 27K / 30K / 35K / 42K / 52K	5.4 W/ft	237 lm/ft	UNIFORM	95+	16 ft 1"
★ H4.4W (White)	20 / 65 / 68	22K / 24K / 27K / 30K / 35K / 42K / 52K	4.4 W/ft	237 lm/ft	UNIFORM	90+	32 ft 2"
TW5.3W (Tunable White)	20 / 65 / 68	1835 (18-35K) / 2235 (22-35K) / 2752 (27-52K)	5.3 W/ft	247 lm/ft	UNIFORM	90+	16 ft 3.3"
8.8W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	8.8 W/ft	259 lm/ft	UNIFORM	90+	32 ft 1"
H6.6W (White)	20 / 65	22K / 27K / 30K / 35K / 42K / 52K	6.6 W/ft	333 lm/ft	UNIFORM	90+	16 ft 1.3"
★ H5.3W (White)	20 / 68	27K / 30K / 35K / 42K / 52K	5.3 W/ft	344 lm/ft	UNIFORM	90+	16 ft 2"
★ HO5.9W (White)	20 / 68	27K / 30K / 35K / 42K / 52K	5.9 W/ft	403 lm/ft	UNIFORM	90+	16 ft 2"
C2.2W (Static Color)	20 / 65 / 68	RED / AMB / GRN / BLU	2.2 W/ft	N/A	IMAGING	—	60 ft 3.9"
C4.4W (Static Color)	20 / 65 / 68	RED / AMB / GRN / BLU	4.4 W/ft	N/A	UNIFORM	—	32 ft 2"
CC4.4W (RGB)	20 / 65 / 68	RGB	4.4 W/ft	54 lm/ft	IMAGING	—	32 ft 3.9"
TC4.4W (RGB)	20 / 65	RGB	4.4 W/ft	78 lm/ft	UNIFORM	—	16 ft 2"
★ CC5.9W (RGB)	20 / 65	RGB	5.9 W/ft	144 lm/ft	UNIFORM	—	32 ft 2.8"
CW5.8W (RGBW)	20 / 65 / 68	R30 (RGB + 30K) / R60	5.8 W/ft	130 lm/ft	IMAGING	80+	32 ft 3.9"
★ CW7.0W (RGBW)	20	R30 (RGB + 30K) / R60	7.0 W/ft	151 lm/ft	SEMI-UNIFORM	90+	28 ft 2.5"
CW7.6W (RGBW)	20 / 65 / 68	R22 (RGB + 22K) / R27 / R30 / R35 / R42 / R52	7.6 W/ft	159 lm/ft	UNIFORM	90+	16 ft 2.5"
CW8.8W (RGBW)	20 / 65	R27 (RGB + 27K) / R30 / R35 / R42 / R52	8.8 W/ft	270 lm/ft	IMAGING	90+	22 ft 3.9"

* 1.5W and 2.2W IP65/68 tapelight maximum run is reduced to 50 ft, only IP20 may reach maximum run of 60 ft.

♦ Recommended options.

♦ Warm Fade tapelight requires a UDEFF or 0-10V dimmable power supply.

** Diode visibility data tested at 100% output. Diodes may become more visible as tapelight dims.


* Lumen data based on frosted lens, IP20 tapelight, 30K white output, or combined output for tunable white, warm fade, RGB, and RGB(W) tapelights.

* Protection varies according to IP Rating. See below or refer to llialighting.com/resources for more information.

 IP20, uncoated - Dry Location

 IP65, silicone covered - Wet Location - Limited protection from water ingress. Not suitable for applications that may see pooling or standing water conditions. Not suitable for submersion.

 IP68, solid silicone - Wet Location - Full protection against water ingress for most applications. Limited protection from water ingress in submerged applications.



SEAMLESS WALL WASHER EXTRUSION + LED TAPELIGHT

ORDERING GUIDE (CONTINUED)

5. LENGTH

5.
LENGTH

48IN

Enter overall extrusion length in inches. Maximum assembled length is 78in. Lengths over 78in are made with multiple sections, shipped unassembled. Overall Extrusion+LED tapelight length will be rounded down based on nearest LED tapelight cut point.

6-8. POWER FEED (OPTIONAL)

6. LEAD TYPE	7. LEAD LENGTH	8. FEED TYPE
[blank]	[blank]	[blank]



Default [blank] - 48" hard wire rear feed (PWR48RF)

PWR Hard wire
MBC* Male barrel
FBC* Female barrel

Enter desired wire length in inches.

EF End Feed
RF Rear Feed

STANDARD 48" HARD WIRE REAR FEED INCLUDED UNLESS OTHERWISE SPECIFIED



Hard wire, no connector - default (**PWR**)




Male barrel connector (**MBC***)




Female barrel connector (**FBC***)

*Barrel connectors not compatible with RGB, RGB(W), or Tunable White tapelights.

WHAT'S INCLUDED



EXTRUSION WITH LENS



LED TAPELIGHT WITH POWER FEED



ENDCAPS

SEAMLESS WALL WASHER EXTRUSION + LED TAPELIGHT

LUMEN OUTPUT MULTIPLIERS (FOR ESTIMATING DELIVERED LUMENS)

COLOR TEMPERATURE	LUMEN MULTIPLIER
2200K	0.8
2700K	0.9
3000K	1
3500K	1.1
4200K	1.2
5200K	1.25




IP RATING	LUMEN MULTIPLIER
IP20	1
IP65	0.9
IP68	0.9

EXAMPLE: Extrusion with H4.4W, IP65, 5200K

(Output @ 30K) x (Color temperature lumen multiplier) x (IP rating lumen multiplier) = Estimated delivered lm/ft

$$237 \text{ lm/ft} \times 1.25 \times 0.9 = 267 \text{ lm/ft}$$

PHOTOMETRY

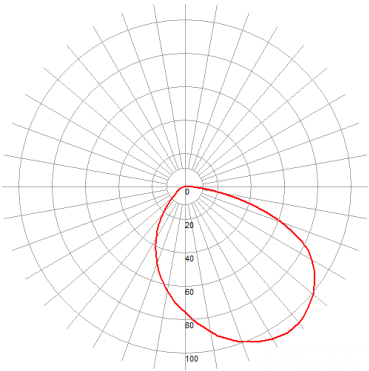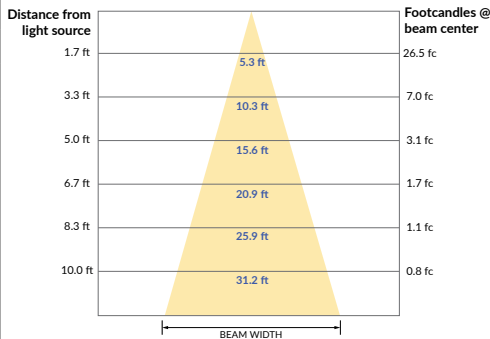LLI-SWW-WF-5.4W-29K-24V*		BEAM SPREAD	POLAR CHART	CONICAL CHART
POWER (W/ft)	5.4W	105° 		ILLUMINANCE AT A DISTANCE 
OUTPUT (lm/ft)	237 lm/ft			
COLOR TEMPERATURE	2900K			
BEAM SPREAD	105°			
EFFICACY (lm/W)	44 lm/W			

*Information for other options available upon request. IES files for extrusion+tapelight available upon request.


POWER SUPPLIES SOLD SEPARATELY

DIMMABLE ELECTRONIC 0-10V

Optimal performance dims to 0%.*





PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DE010-030W-24V-KO	30W	120V or 277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.6"
LLI-PS-DE010-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.6"
LLI-PS-DE010-096W-24V-KO	96W	120V or 277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-DE010-192W-24V-CL2-KO	2x96W	120V or 277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-DE010-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-DE010-288W-24V-CL2-KO	3x96W	120V or 277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-DE010-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"

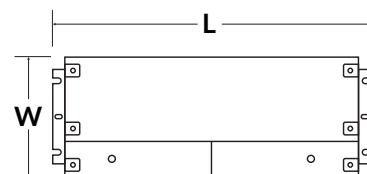

NON-DIMMABLE ELECTRONIC



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-NDE-030W-24V-KO	30W	100-277V	24V	CLASS 2	IP66 WET	6.5"	3.5"	1.02"
LLI-PS-NDE-060W-24V-KO	60W	100-277V	24V	CLASS 2	IP66 WET	7.4"	3.5"	1.2"
LLI-PS-NDE-096W-24V-KO	96W	100-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.7"
LLI-PS-NDE-192W-24V-CL2-KO	2x96W	100-277V	24V	CLASS 2	IP66 WET	10.9"	4.1"	1.9"
LLI-PS-NDE-200W-24V-KO	200W	100-277V	24V	CLASS 1	IP66 WET	10.3"	4.1"	1.8"
LLI-PS-NDE-288W-24V-CL2-KO	3x96W	100-277V	24V	CLASS 2	IP66 WET	11.9"	4.1"	1.9"
LLI-PS-NDE-300W-24V-KO	300W	100-277V	24V	CLASS 1	IP66 WET	10.9"	4.3"	1.8"


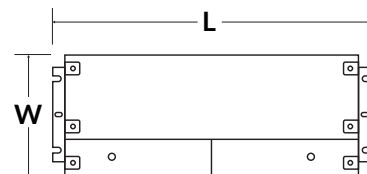


DIMMABLE ELECTRONIC FLICKER-FREE

Optimal performance dims to 2-5%.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-UDEFF-030W-24V-KO	30W	110-277V	24V	CLASS 2	IP66 WET	6.5"	3.6"	1.0"
LLI-PS-UDEFF-060W-24V-KO	60W	110-277V	24V	CLASS 2	IP66 WET	7.4"	3.6"	1.0"
LLI-PS-UDEFF-096W-24V-KO	96W	110-277V	24V	CLASS 2	IP66 WET	8.7"	3.7"	1.6"
LLI-PS-UDEFF-192W-24V-CL2-KO	2x96W	110-277V	24V	CLASS 2	IP66 WET	10.9"	4.3"	1.9"
LLI-PS-UDEFF-200W-24V-KO	200W	110-277V	24V	CLASS 1	IP66 WET	10.2"	4.1"	1.8"
LLI-PS-UDEFF-288W-24V-CL2-KO	3x96W	110-277V	24V	CLASS 2	IP66 WET	11.9"	4.3"	1.9"
LLI-PS-UDEFF-300W-24V-KO	300W	110-277V	24V	CLASS 1	IP66 WET	11.0"	4.3"	1.8"


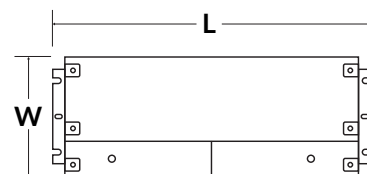


DIMMABLE MAGNETIC

Optimal performance dims to 5-10%.*



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
LLI-PS-DM-020W-24V-KO	20W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-040W-24V-KO	40W	120V or 277V	24V	CLASS 2	NEMA 3R WET	7.38"	2.11"	1.60"
LLI-PS-DM-060W-24V-KO	60W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-100W-24V-KO	100W	120V or 277V	24V	CLASS 2	NEMA 3R WET	8.13"	3.93"	1.59"
LLI-PS-DM-150W-24V-KO	150W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-200W-24V-KO	200W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-KO	300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	8.79"	4.15"	3.41"
LLI-PS-DM-300W-24V-CL2-KO	6 x 50W	120V or 277V	24V	CLASS 2	NEMA 3R WET	10.29"	5.69"	3.43"
LLI-PS-DM-600W-24V-KO	2 x 300W	120V or 277V	24V	CLASS 1	NEMA 3R WET	10.29"	6.79"	4.68"

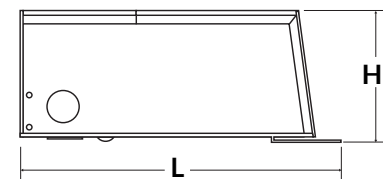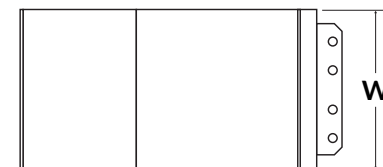


LUTRON HI-LUME PREMIER 0.1% DIMMABLE ELECTRONIC

Soft-on, Fade-to-Black, continuous flicker-free dimming from 100% to 0.1.



PART NUMBER	CAPACITY	INPUT	OUTPUT	CLASS	LOCATION	L	W	H
L3D0-96W24V-U	96W	120-277V	24V	CLASS 2	IP20 DRY	10.5"	5.5"	2.0"

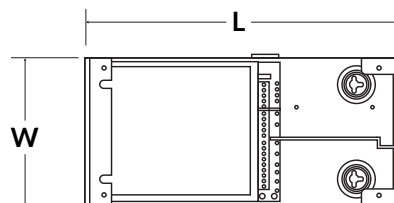

*Performance can be affected by driver loading and dimmer type.

CONTROLS (SOLD SEPARATELY)
