


TUNABLE WHITE

LED TAPELIGHT

Achieve any ambiance with just one strip!



FEATURES


- Adjust LED tapelight to any CCT desired in a space
- No imaging with certain extrusions, recommended to be used with Deep extrusion.
- Pre-assembled extrusions with LEDs assembled in the USA
- Field-cuttable or field trimmable if needed
- Controls & dimming modules available to complete system

SPECIFICATIONS

MODEL	LLI-LTW2.7W		LLI-LTW5.3W	
WATTAGE	2.7W per foot		5.3W per foot	
CCT/COLOR	18K-35K	27K-52K	18K-35K	27K-52K
*OUTPUT	@27K - 289lm/ft @18K - 105lm/ft @35K - 184lm/ft	@40K - 314lm/ft @27K - 151lm/ft @52K - 163lm/ft	@27K - 525lm/ft @18K - 210lm/ft @35K - 315lm/ft	@40K - 549lm/ft @27K - 268lm/ft @52K - 281lm/ft
IP RATING	dry, damp, or wet depending on model			
INPUT VOLTAGE	24VDC, Requires a remote 24V power supply			
MOUNTING	Architectural Extrusions			
CONTROLS	Color and intensity can be adjusted with DMX decoder or RF receiver and controller			

GENERAL WIRING DIAGRAM

* IP20 data shown, reference website for additional information

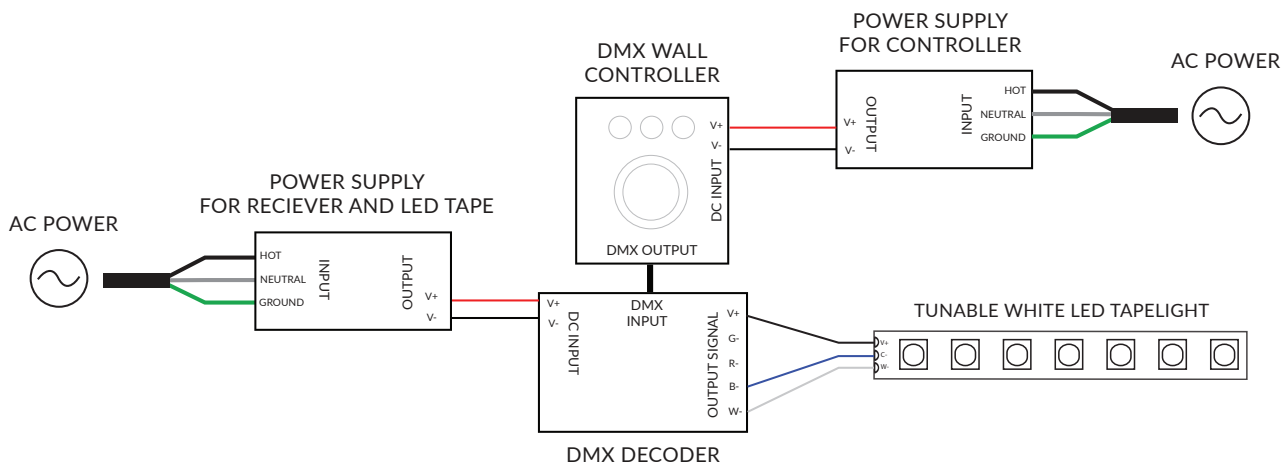

Additional wiring methods are available, reference website for more details.