



FEATURES


- Compatible with *1/2" and 5/8" drywall (no stud notching)
- Minimalist, refined approach to illuminating spaces
- No obtrusive profiles or canopies
- Custom lengths available
- Seamless extrusions with LEDs are pre-assembled in the USA
- No field mitering required for creating 90° turns.
L, T, X corners available in all sizes.

* 1/2" drywall compatible with only Seamless 1.0"


SPECIFICATIONS

MODEL	0.5"	1.0"	1.5"	2.0"
LENS	Frosted			
INPUT VOLTAGE	24VDC, Requires a remote 24V power supply			
CCT/COLOR	22K - 52K, RGB, RGBW, Tunable White			
DELIVERED LUMENS	84 - 474 lm/ft	124 - 689 lm/ft	220 - 931 lm/ft	199 - 841 lm/ft
MOUNTING	Mounting screws and plaster (not included)			
POWER FEED	Left Side feed, Bottom feed, End feed, Right Side feed			
PRE-FAB CORNERS	 90° inside	 90° outside	 90° flat	


DIMENSIONS




Seamless 0.5"

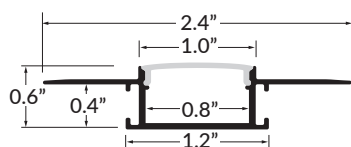

Seamless 1.0"

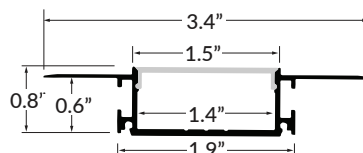

Seamless 1.5"

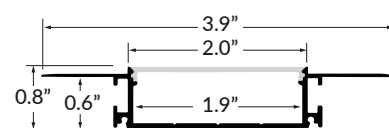

Seamless 2.0"